
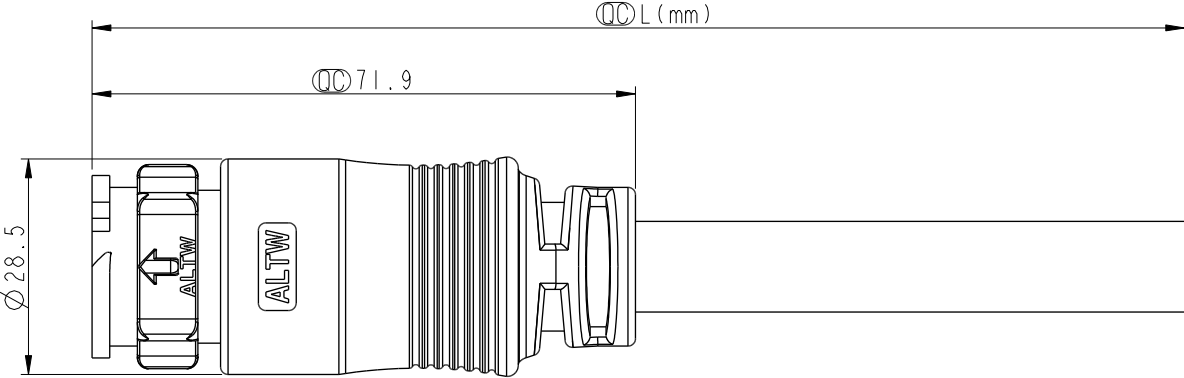
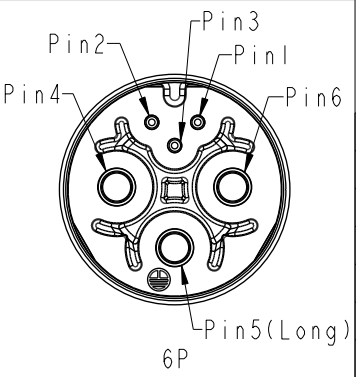


		1		2		3		4		5		6		7		8	
										REV.	ECN NO.	DATE	SIGN	DESCRIPTION			
										A		2021/10/08	Ruru	Initial Released			
										B	C220629	2022/05/05	Vicky	⚠XI			
DCD-XXAMMM-QL8CXX																	
XX: No. Of Pin																	
XX: 01~99Meters																	
01: 01Meter																	
02: 02Meters																	
⋮																	
99: 99Meters																	
																	
Conn.																	
																	
6P																	
Pin Assignments Front View										Pin Out							
UNIT:mm										TITLE							
TOLERANCE										XLOK, D-20A+5A, CABLE W/SR							
±0.5 mm										M, M, MOLDING, PUSH LOCK							
SCALE										SIZE							
1:2										A4							
REV.										SHEET							
B										OF							
WC-REV.										A.3							
QC										Inspection item							
Amphenol LTW										ITEM NO							
安費諾亮泰企業股份有限公司										DRAWN BY							
										Ruru							
										DATE							
										2021-10-08							
										DWG NO							
										DCD-XXAMMM-QL8CXX							
										CHECKED BY							
										Rita							
										DATE							
										2021-10-08							
										CUSTOMER							
										ALTW							
										APPROVED BY							
										Max							
										DATE							
										2021-10-08							
										W10814-03-0001A2							

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Note:
* RoHS Compliant
* Ⓢ Important dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector
Housing: Thermoplastic, Black
Pin-1: Copper alloy, Gold plated
⚠ Pin-2: Copper alloy, Nickel plated
Outer mold: Thermoplastic, Black
* Cable: UL2517 (24#*1P+D+AL)+14#*3C+F+PA, PVC Jacket, OD=12.0, Black
* Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

Twist
對線