
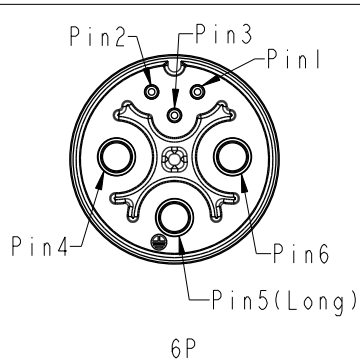
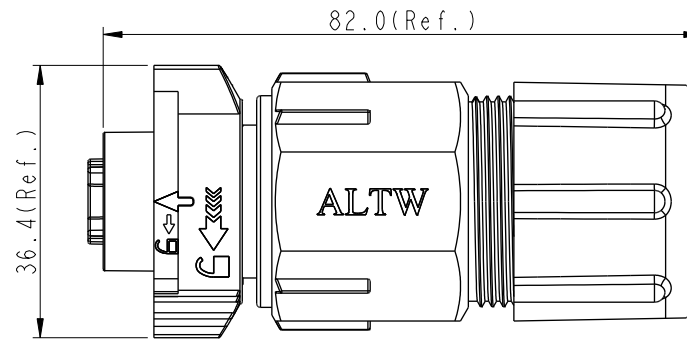



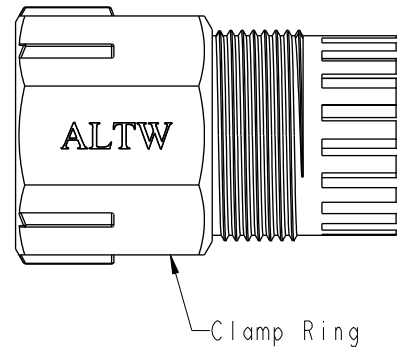



	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021/10/21	Ruru	Initial Released
B	C220628	2022/05/06	Vicky	 XI

DCD-XXBFMB-QL800 I
XX: No. Of Pin

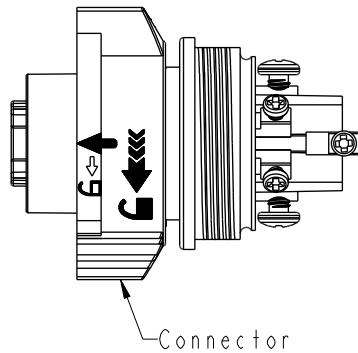

Note:

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin-1: Copper Alloy, Gold plated
 -  Pin-2: Copper Alloy, Nickel plated
 - Nut: Thermoplastic, Black
 - O-Ring: Rubber, Gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber, Dark Gray, OD: $\varnothing 8.0\text{mm} \sim \varnothing 14.5\text{mm}$
 - * One set assembled in one pe bag

UNIT:mm				TITLE XLOK, D-20A+5A, CABLE W/O SR F, M, FI SCREW IN, PUSH LOCK		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Ruru		DATE 2021-10-21	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		SCALE 1:1		SIZE A4				SHEET 1 OF 1		DWG NO DCD-XXBFMB-QL8001		CHECKED BY Rita	
		REV. B		WC-REV. A.3		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max		DATE 2021-10-21	

Amphenol LTW
安費諾亮泰企業股份有限公司