



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN11C0005	2011/11/30	Vicky	REF. TO ECR/N.NOTE.
D	LEN1580257	2015/04/28	Jinhai	Change Logo
E	C200907	2020/06/12	Ruru	 X3

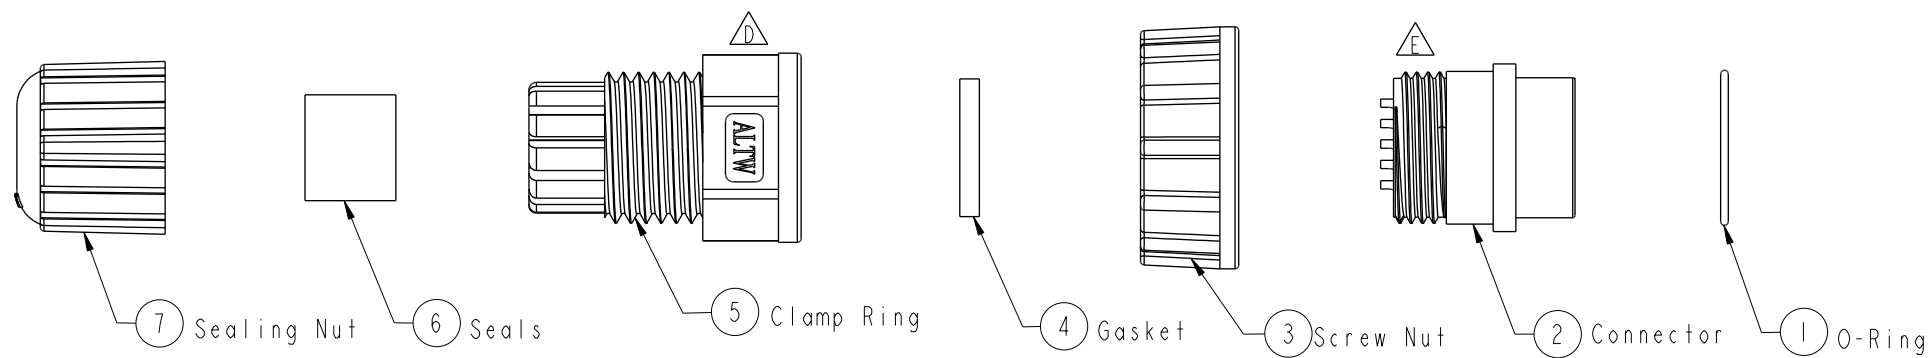

ALTW
CONFIDENTIAL
2020-06-12
R&D DEPT.

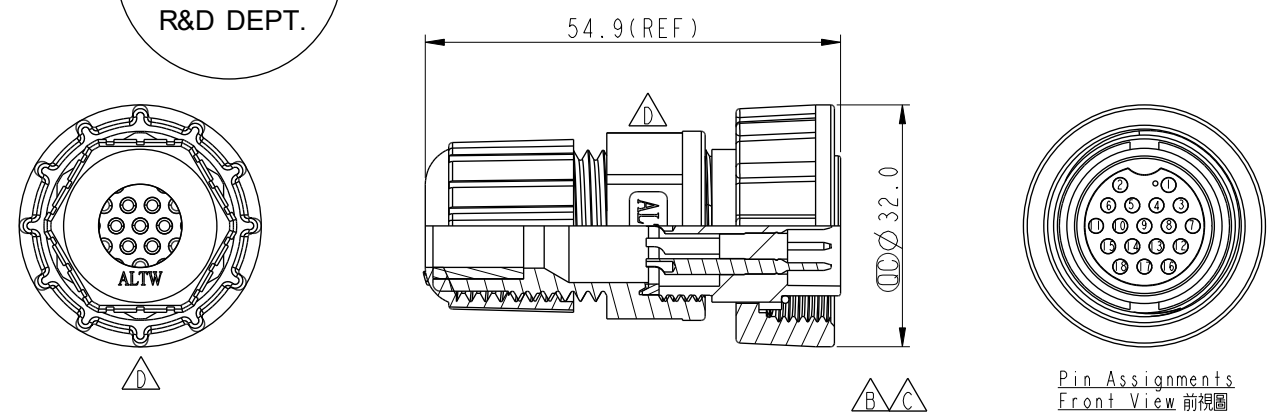

-  Note:
- *  Important Dimension.
 -  * Waterproof Rate: IP67
 - * Connector: Thermoplastic, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * O-Ring: Rubber, Black
 -  * Screw Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Seals: Rubber, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals For Cable OD: $\varnothing 5.5\text{mm} \sim 10.8\text{mm}$
 - * One Set Unassembled in One PE Bag

UNIT:mm		 		TITLE O CERES, D-5A, 18P, CABLE W/O SR F, M, FI SOLDER, SCREW 		ITEM NO DD-18BFMA-SL7001		DRAWN BY Jinhai		DATE 2015-04-28	
TOLERANCE .X .XX .XXX ANGLES		± 0.25 ± 0.1 ± 0.05 $\pm 1^\circ$		SCALE 1:1	SIZE A4	SHEET 1 OF 1	DWG NO DD-18BFMA-SL7001	CHECKED BY Tom	DATE 2015-04-28		
REV. E		WC-REV. A.2		 : Inspection item		CUSTOMER ALTW		APPROVED BY Jerry	DATE 2015-04-28		

Amphenol LTW
安費諾亮泰企業股份有限公司