

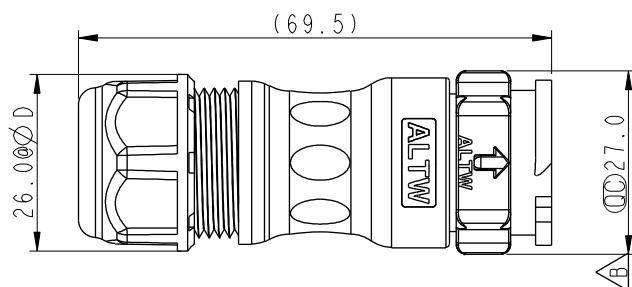






REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	E191899	2019/11/20	Ruru	$\triangle$ B X4




DD-XXBMMA-QL8XP0
14-14 Pin
18-18 Pin

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

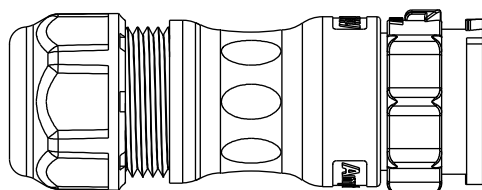

Pin
Assignments
Front View



14 Pin



18 Pin

$\triangle$ B Note:

- * ϕ Important Dimension
- * Waterproof Rate: IP68, Mated
IP68 : 1M Depth Of Water In 24hours
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	XLOK, D-5A, CABLE W/O SR M, M, FI CRIMP, XLOK $\triangle$ B
SCALE	1:1	SIZE A4
REV.	B	WC-REV. .0
		ϕ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2019-11-20
DWG NO	CHECKED BY	DATE
DD-XXBMMA-QL8XP0 $\triangle$ B	Rita	2019-11-20
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-11-20