


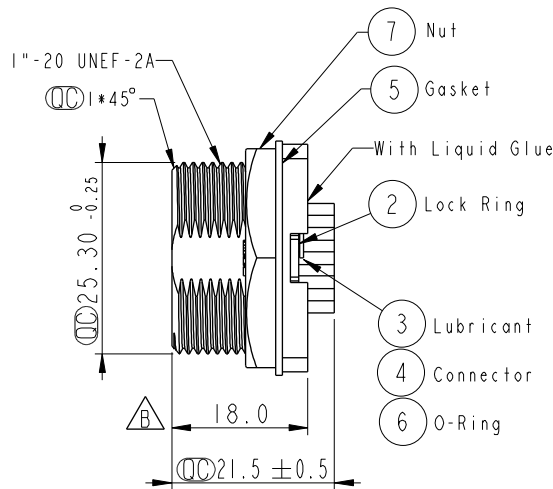


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8C0038	2008/12/01	Vincent	Chage Size
C	CI90314	2019/03/13	Ruru	Modify Note

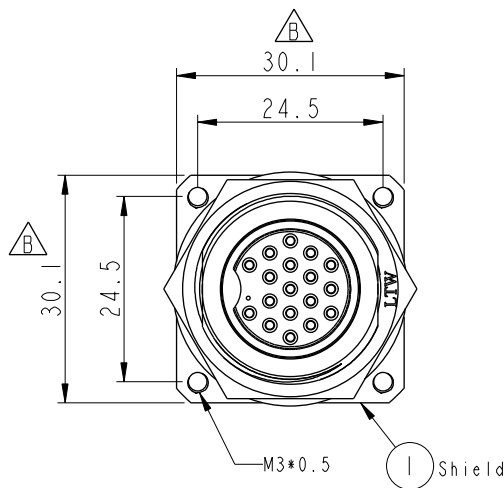


- Note: $\triangle$
- * CC Important Dimension .
 - * Waterproof Rate: IP68, Unmated
1M Depht of water in 24 hours
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Shield: Metal, Nickel Plated
 - * Gasket: Rubber, Black
 - * Nut: Metal, Nickel Plated
 - * O-Ring: Rubber, Black
 - * Connector With Glue (Connector)
 - * O-Ring Rub Rubber Lubricant (O-Ring)
 - * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 3.5mm
 - * Gasket and Nut are packed separately
in PE bags.



Pin Assignment
Front View

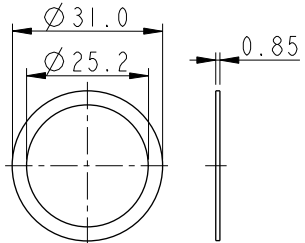

Gasket



Recommended
Panel Cut-Out

UNIT:mm			TITLE 18Pin Shielded Male Connector Female Pin (PCB Type)			
TOLERANCE			SCALE	SIZE	SHEET	OF
.X ±0.25			1:1	A4	1	1
.XX ±0.1			REV.	WC-REV.	A.2	
.XXX ±0.05			C			
ANGLES ±1°			QC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DSD-18PMFS-SS8002	DRAWN BY	Ruru	DATE	2019-03-13
DWG NO	DSD-18PMFS-SS8002	CHECKED BY	Rita	DATE	2019-03-13
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-13