


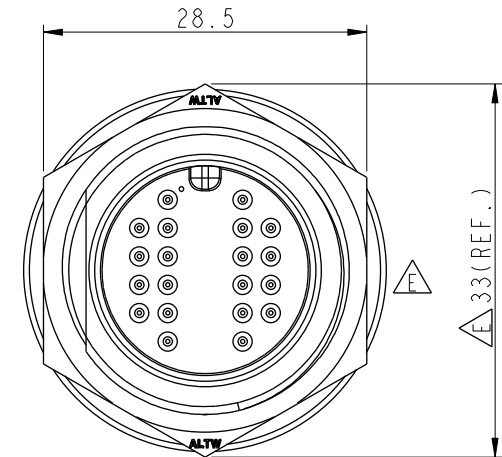
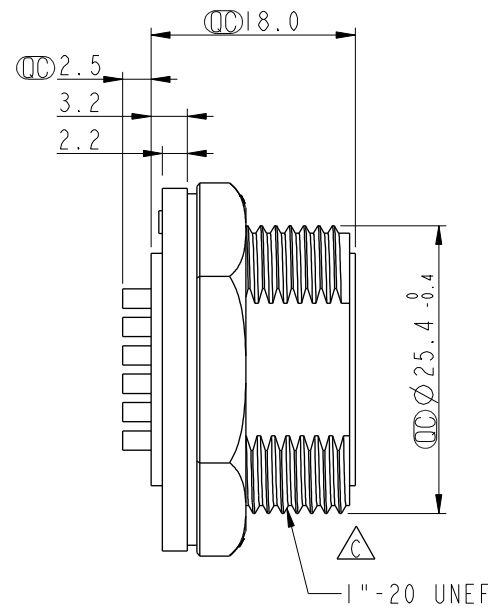
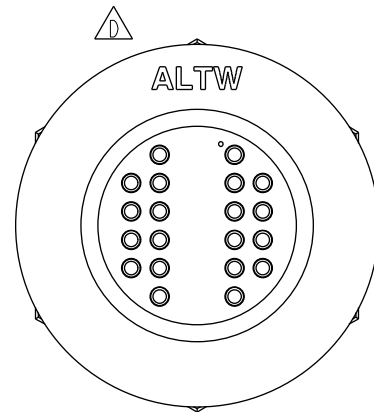



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1650014	2016/04/26	Ruru	Modify Nut View & Logo & Dimension
F	LEN1840053	2018/04/12	Ethan	Modify Panel Thickness
G	C190314	2019/03/13	Ruru	Modify Note

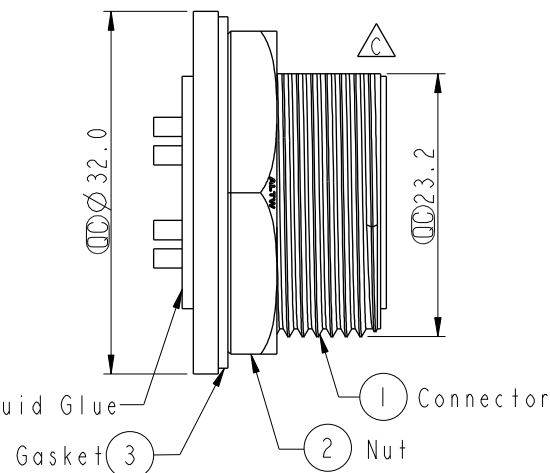

Pin Assignments

Front View



Note: $\triangle G$

- *  Important Dimension.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
-  * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 1.8mm
-  * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
- * Gasket and Nut are packed separately in PE bags.

UNIT : mm

TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE
Large, Panel Lock 20Pin M Conn M Pin

SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. G	WC-REV. A.2	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO DU-20PMM5-SC7001	DRAWN BY Ruru	DATE 2019-03-13
DWG NO DU-20PMM5-SC7001	CHECKED BY Rita	DATE 2019-03-13
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-13