



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1390195	2013/09/02	Lu Di	Update Dimension



PANEL THICKNESS




Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm

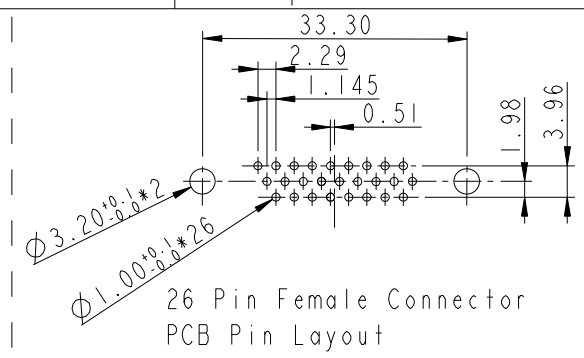


26 Pin Female Connector
PCB Pin Layout



NOTE:
* $\varnothing$ Important Dimension.
* Waterproof Rate : IP68
IP68: 1M of depth of water 24 hours
* Materials:
Panel : Zinc
Panel Link : Zinc
Screw : Stainless, #4-40 UNC
O-Ring : Silicone , Black
Insulator : PBT
Shell : Cold Rolled Steel
Contact : Copper Alloy
Board Lock : Copper Alloy
* Finish:
Panel : Nickel Plated
Panel Link : Nickel Plated
Board Lock : Nickel Plated
Shell : Nickel Plated
Contact : Gold Flash

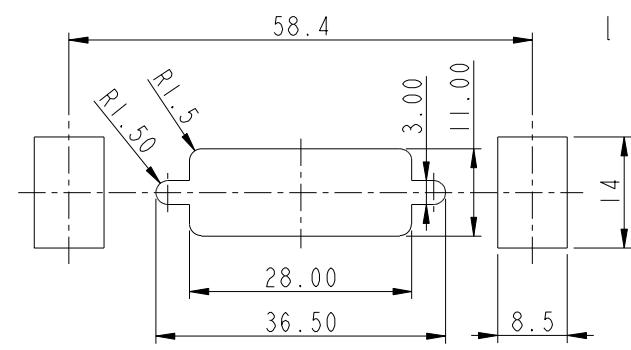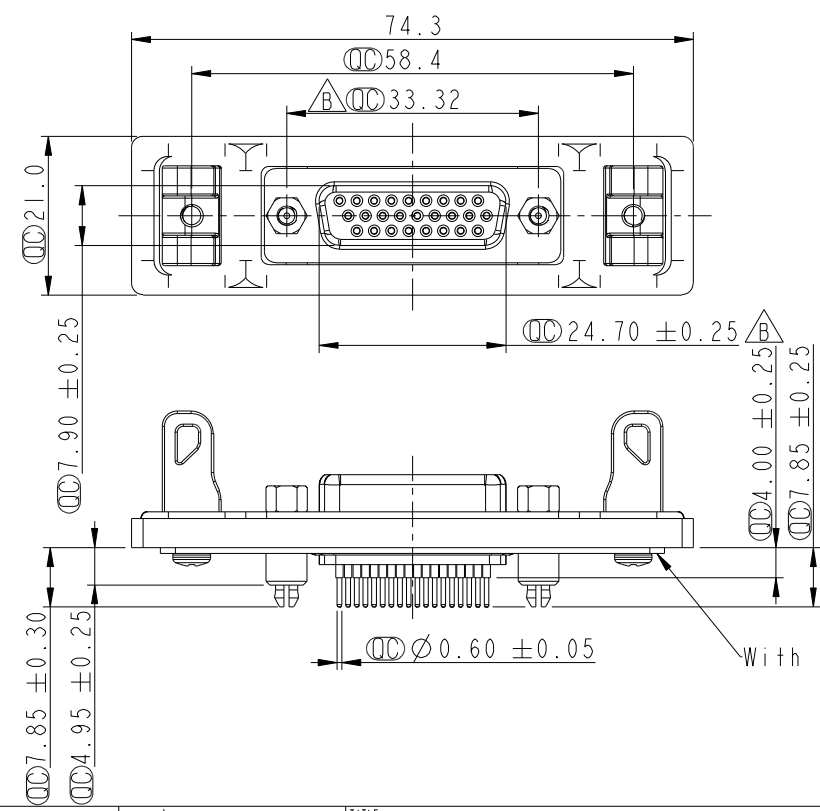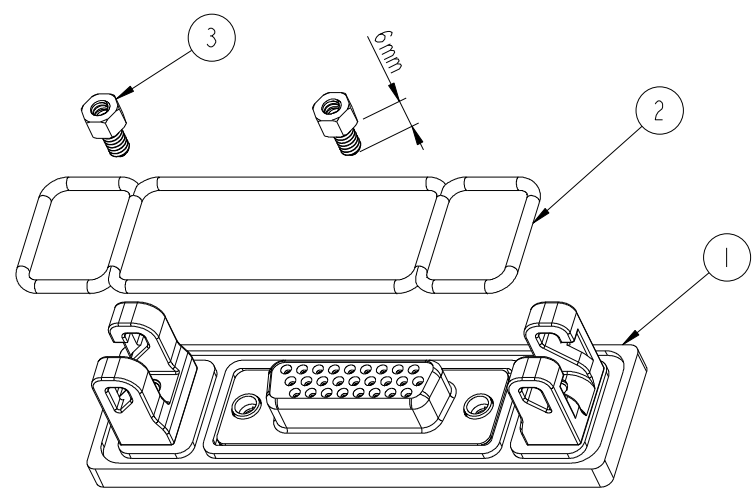

RECOMMENDED PANEL CUT-OUT



With Liquid Glue
點防水膠

UNIT: mm		
TOLERANCE		
.X	±0.25	
.XX	±0.1	
.XXX	±0.05	
ANGLES	±1°	

TITLE D-SUB CONN PANEL QUICK HD26P F CONN F PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.4	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO HDB-26PFFP-QA8001	DRAWN BY Di_lu	DATE 2013/09/02
DWG NO HDB-26PFFP-QA8001	CHECKED BY Mafei	DATE 2013/09/02
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013/09/02