


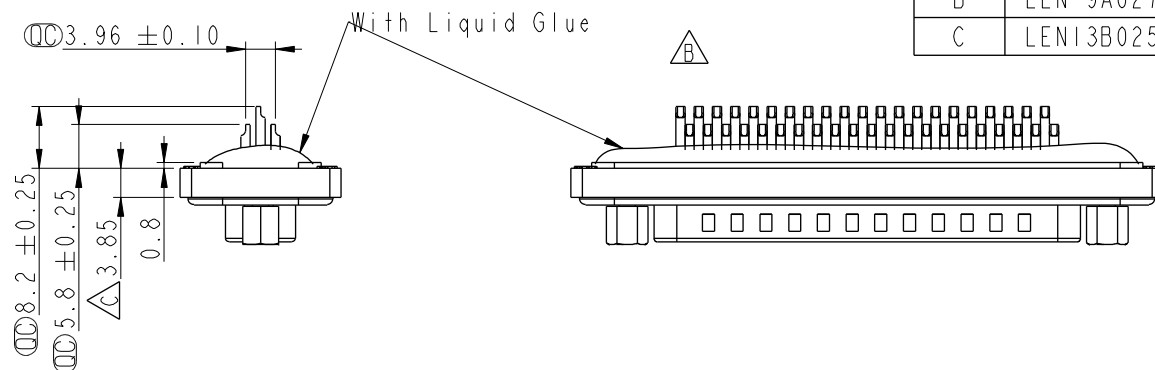


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2007/09/18	Robert Hsu	
B	LEN-9A0279	2009/10/12	Vicky	REF. TO ECR/N.NOTE.
C	LEN13B0259	2013-11-12	Sam	Modify Dimension.




Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚為 1.2mm 以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

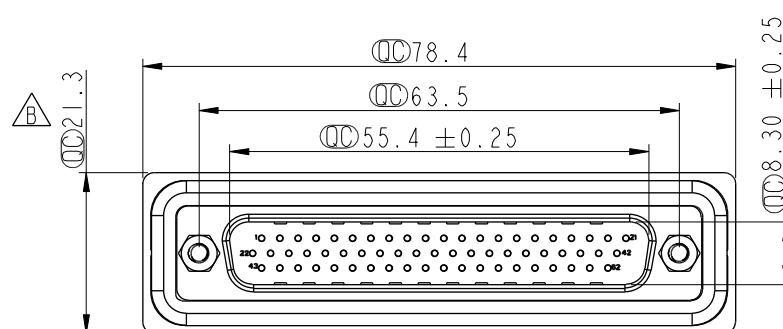

Note:
* $\varnothing$ Important Dimension.
* Waterproof Rate: IP67
* Do Mating Test After Glued
點膠後，須作對插測試
* Housing: Nylon+GF, Black.
* Connector: PBT, Black.
* Male Pin: Copper Alloy, Gold Plated.
* Ring: Silicone, Light Blue.
* Screw: Copper Alloy, Nickel Plated, #4-40 UNC.
* Applicable Wire Range: 24AWG-28AWG.
適用電線範圍: 24AWG-28AWG

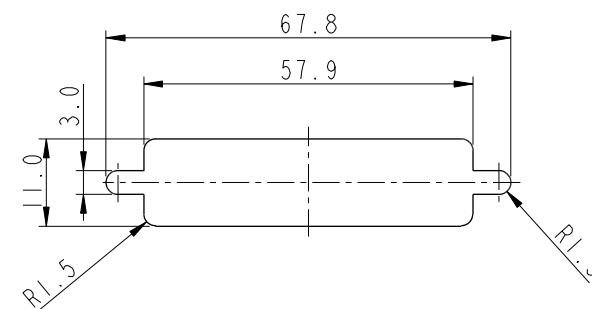

Recommended Panel Cut-Out
建議挖孔尺寸

UNIT: mm		TITLE D-SUB Conn. Panel Screw HD62P M Conn. M Pin
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$		SCALE I:1 SIZE A4 SHEET 1 OF 1 REV. C WC-REV. A.2 $\varnothing$ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO HDB-62PMMS-SL7001	DRAWN BY SamChang	DATE 2013-11-12
DWG NO HDB-62PMMS-SL7001	CHECKED BY Jeffrey	DATE 2013-11-12
CUSTOMER ALTW	APPROVED BY Rate	DATE 2013-11-12