
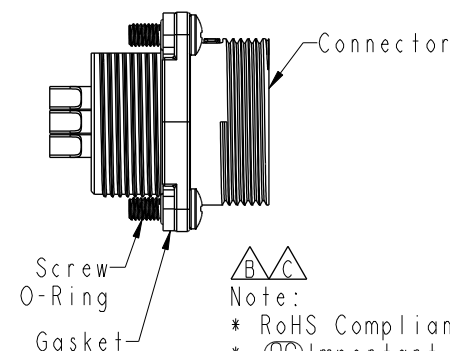

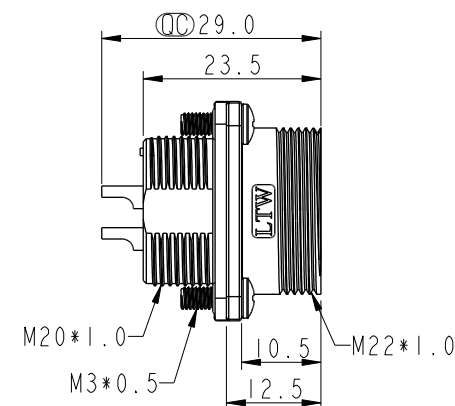




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31650232	2016/05/04	Vicky	Update Note
C	C210669	2021/04/30	Vicky	△C X5
D	C221869	2022/12/05	Vicky	△D X1

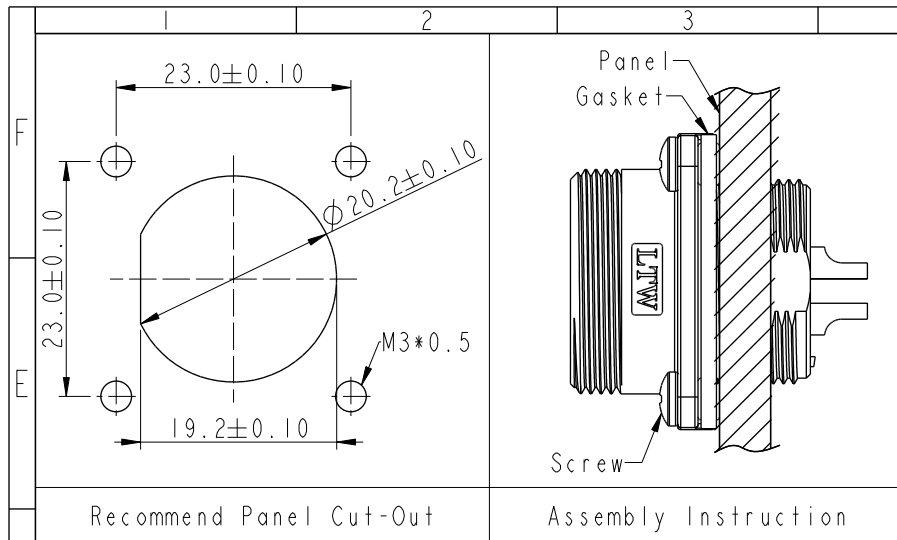

△B △C
Note:

- * RoHS Compliant
- * ⌀ Important dimension
- * △ Waterproof rate: IP68, unmated 1m/24h
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Silver plated
- Gasket: Rubber, Gray
- Shield: Metal
- * Nut: Metal
- * Gasket: Rubber, Gray
- * For panel thickness max: 9.0mm
- * Gasket, screw+o-ring are packed separately in pe bag

△C LC20-XXPMFS-SW8001
XX: No. Of Pin

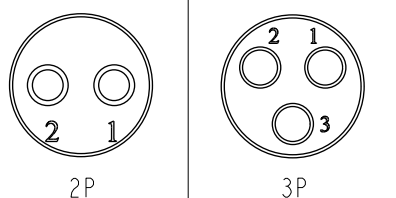

△C Pin Assignments Front View

UNIT:mm		TITLE	O SEN, M20 48H,20A RECEPTACLE, M, F, SOLDER		
TOLERANCE		SCALE	SIZE	SHEET	OF
.X ±0.25		1:1	A4	1	1
.XX ±0.1		REV.	WC-REV.	△C	
.XXX ±0.05		D	A.2	QC:Inspection item	
ANGLES ±1°					

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2016-05-04
DWG NO	CHECKED BY	DATE
△C LC20-XXPMFS-SW8001	Rita	2016-05-04
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016-05-04