




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C202066	2020/12/30	Fu	 X1
E	C210669	2021/04/30	Vicky	 X6
F	C221869	2022/12/05	Vicky	 X1

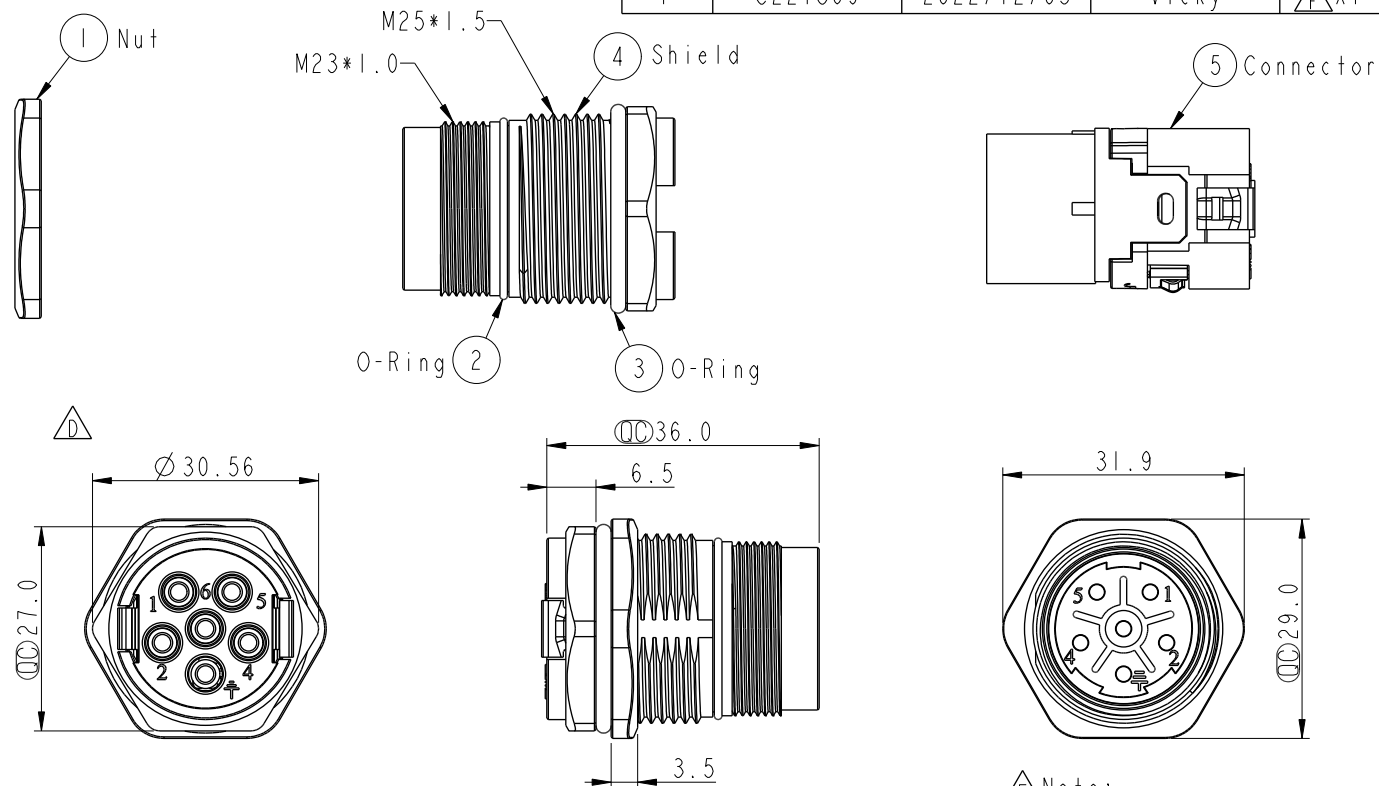

△ LJ23-XXPMC-SF7001
XX: No. Of Pin


Note:

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IP67, unmated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - * Shield: Metal
 - * O-Ring: Rubber, Gray
 - * Nut: Metal
- *  Use without waterproof cap or dust cap
- Panel thickness: 2.0~6.0mm
- * O-Ring and nut are assembled on connectors

Pin Assignments Front View

Recommended
Panel Cut-Out

UNIT: mm




TITLE	O SEN, M23 48H,28A	
	RECEPTACLE, M, M, FI/PANEL CRIMP	

SCALE 1:1	SIZE A4	SHEET 1 OF 2
REV. F	WC-REV. A.5	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ethan	2018-01-15
DWG NO	CHECKED BY	DATE
 LJ23-XXPMMC-SF7001	Feng Li	2018-01-15
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2018-01-15

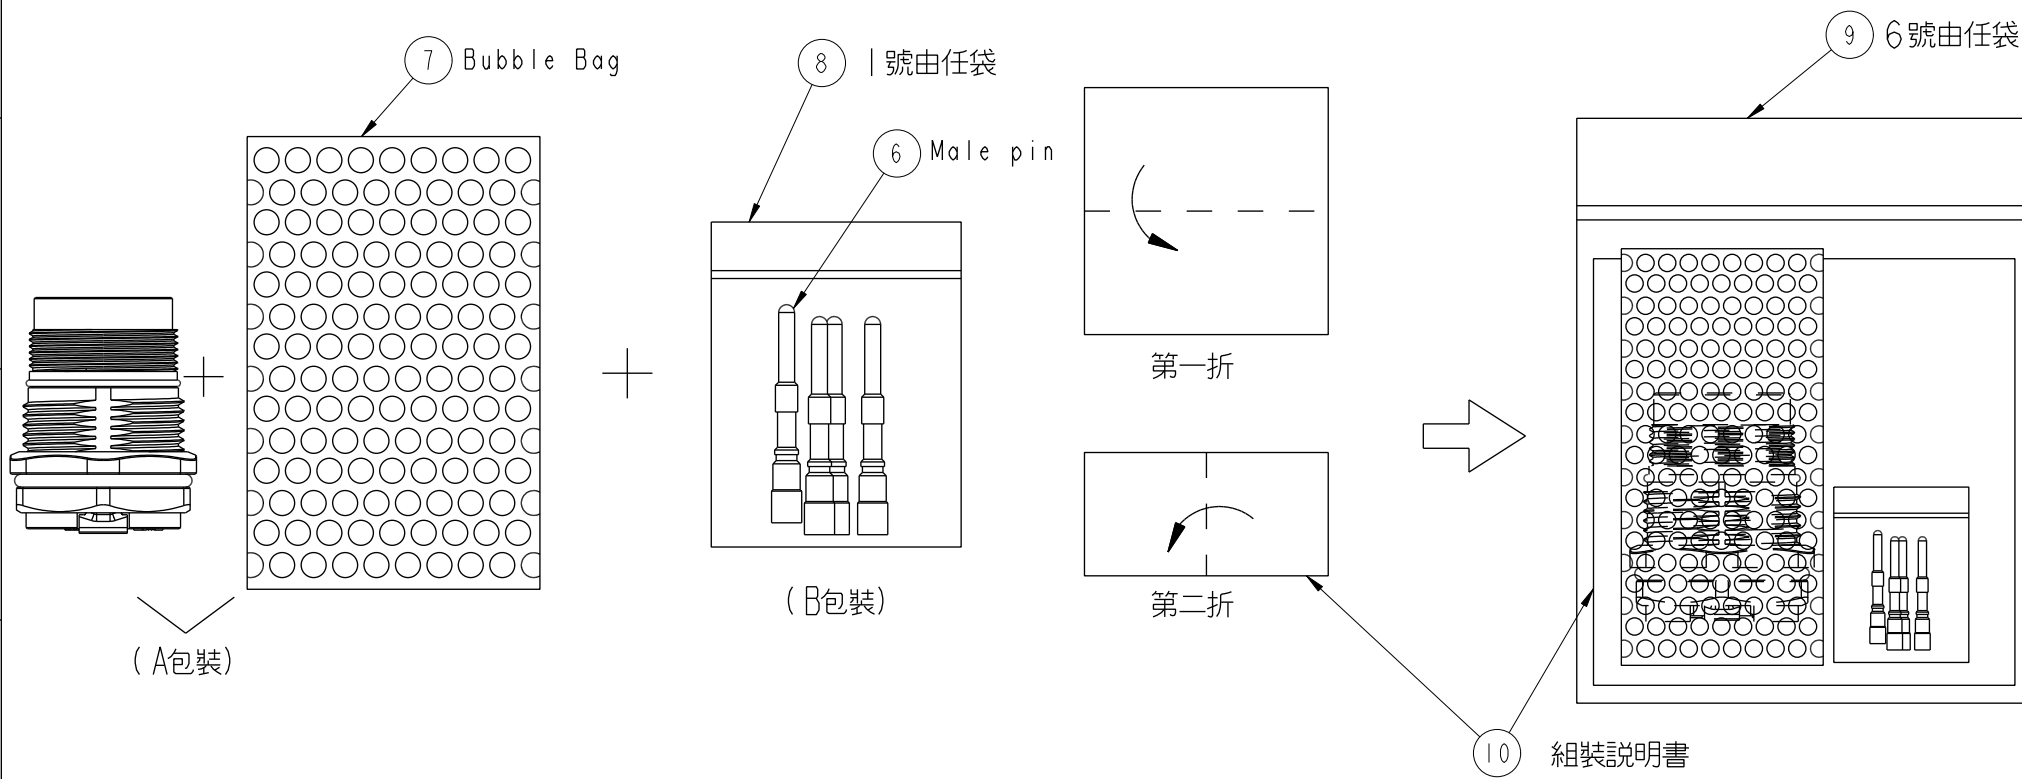

包裝方式

A 包裝 將 ① ② ③ ④ ⑤ 組裝完成後裝入 ⑦ 氣泡袋中
B 包裝 將 ⑥ 裝入 ⑧ | 號由任袋中
最後將 A 包裝與 B 包裝及 ⑩ 組裝說明書一同裝入 ⑨ 6 號由任袋中，即放入紙箱

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		O SEN, M23 48H,28A		DWG NO		Ethan		2018-01-15	
.X		RECEPTACLE, M, M, FI/PANEL CRIMP		E		Feng Li		2018-01-15	
.XX		SCALE		CUSTOMER		Jerry		2018-01-15	
.XXX		1:1		ALTW					
ANGLES		REV. F							
±0.25		SIZE A4							
±0.1		WC-REV. A.5							
±0.05		SHEET 2 OF 2							
±1°		QC:Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司