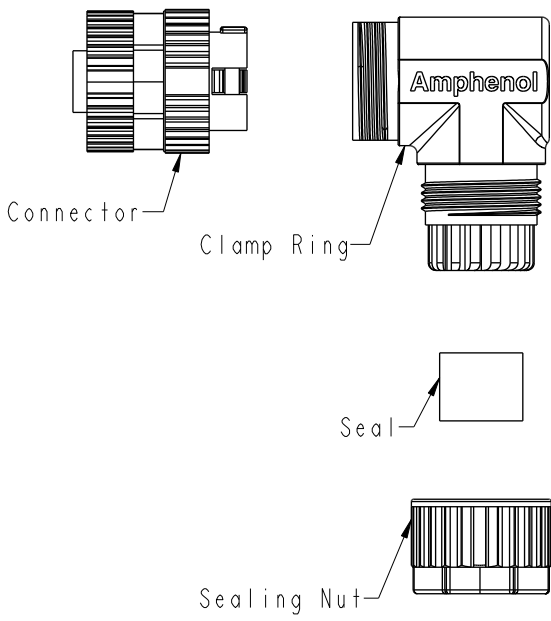

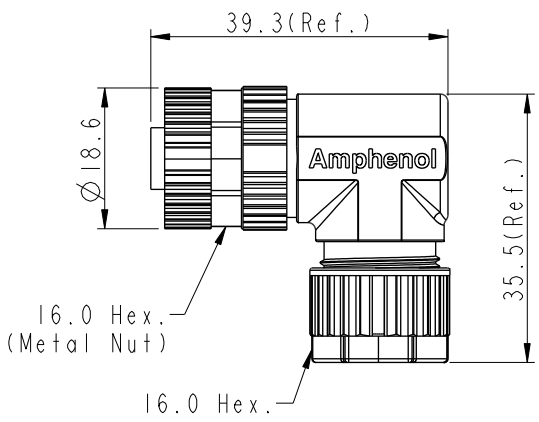

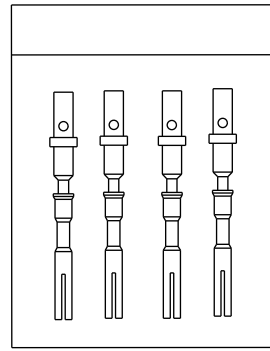


	1	2	3	4	5	6	7	8		
F					REV.		ECN NO.	DATE	SIGN	DESCRIPTION
					D		C201453	2020/10/07	Ruru	△D X4
					E		C210561	2021/04/09	Vicky	△E X2
E					F		C210977	2021/06/23	Vicky	△F X1
										
D					△D MI2A-XXBFFC-SR7001 XX: No. Of Pin					
C	PE Bag 				Note: * RoHS Compliant * △C△D Important Dimension * Waterproof rate: IPX7, mated * Connector Housing: Thermoplastic, Black - Pin: Copper alloy, Gold plated - Extension Nut: Thermoplastic, Black - Nut: Metal △D O-Ring: Rubber, Gray * Clamp Ring: Thermoplastic, Black * Sealing Nut: Thermoplastic, Black △C△D△E△F * Seal: Rubber, Gray, OD:∅4.0mm~∅7.0mm * Applicable wire gauge: 20AWG~24AWG * One set unassembled in one pe bag					
B	4P Pin Assignments Front View				△B△D					
A	UNIT:mm TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				△E △F △C△D△E△F					
TITLE				ITEM NO						
N SEN, MI2 A, SCREW				DWG NO						
CABLE W/O SR, F, F, FI/PANEL CRIMP				MI2A-XXBFFC-SR7001						
SCALE				CUSTOMER						
Free				ALTW						
SIZE				DRAWN BY						
A4				Xiaofeng						
SHEET				CHECKED BY						
1 OF 1				Li-Feng						
REV.				APPROVED BY						
F				Jerry						
WC-REV.				DATE						
.0				2019/12/18						
△C△D△E△F Inspection item				DATE						
				2019/12/18						
				W10814-03-001A2						