

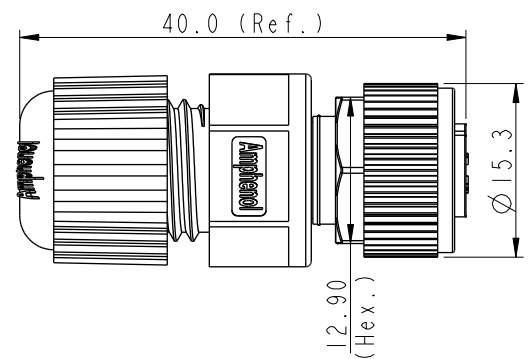



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210561	2021/04/12	Vicky	△B X4

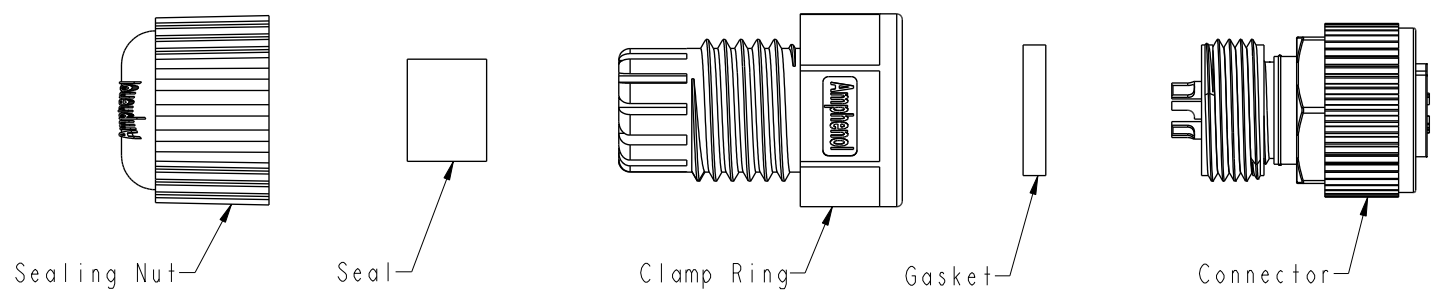

△B MI2B-XXBFFA-SL8001

XX: No. Of Pin

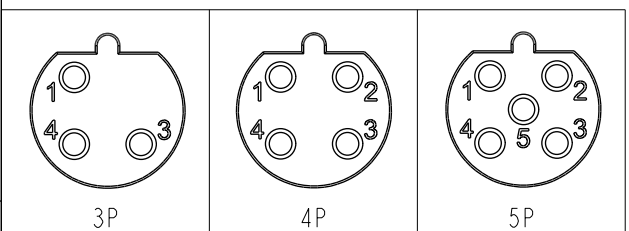

Pin Assignments Front View

- △B Note:
- * RoHS Compliant
 - * Ⓢ Important Dimension
 - * Waterproof rate: IPX8, mated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - Nut: Metal
 - O-Ring: Rubber, Gray
 - * Gasket: Rubber, Gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber, Gray, OD:Ø4.5mm~Ø6.5mm
 - * One set unassembled in one pe bag

UNIT:mm		TITLE	
		N SEN, MI2 B, SCREW	
		CABLE W/O SR, F, F, FI SOLDER	
TOLERANCE		SCALE	SIZE
.X ±0.25		1:1	A4
.XX ±0.1			
.XXX ±0.05			
ANGLES ±1°		REV.	WC-REV.
		B	A.5
		Ⓢ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	JC Chen	2019/08/28
DWG NO	CHECKED BY	DATE
MI2B-XXBFFA-SL8001	Li Feng	2019/08/28
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019/08/28