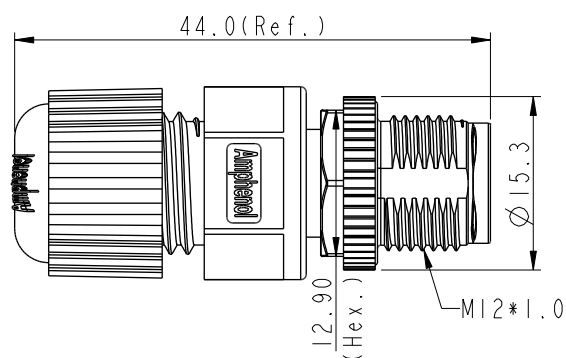



MI2B-XXBMMA-SL800I
XX: No. Of Pin

+	TITLE			
	N SEN, M12 B, SCREW CABLE W/O SR, M, M, FI SOLDER			
	SCALE	1:1	SIZE	A4
	SHEET	1	OF	1
REV.	B	WC-REV.	A.5	 : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	JC Chen	2019/08/28
DWG NO	CHECKED BY	DATE
M12B-XXBMM-SL800I	Li Feng	2019/08/28
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019/08/28

Note:

- * RoHS Compliant
- *  Important Dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - Nut: Metal
- * Gasket: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
- * One set unassembled in one pe bag