

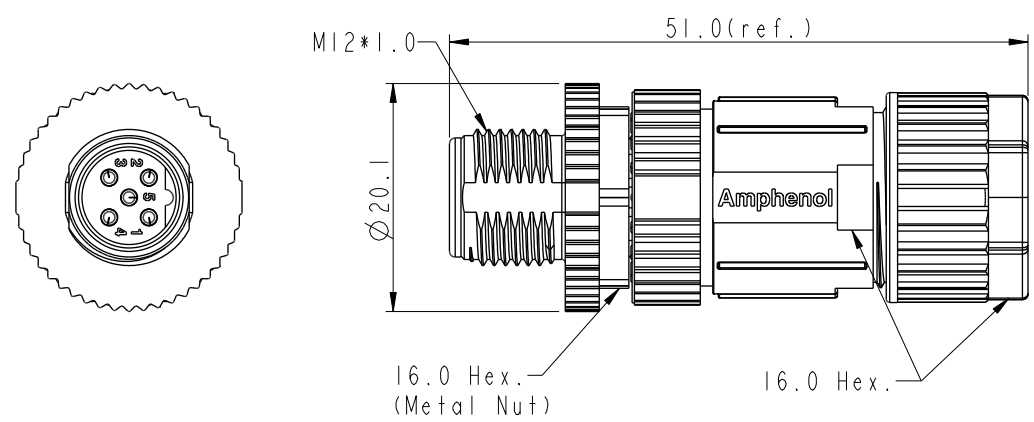


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201473	2020/09/23	Vicky	$\triangle B$ X4
C	C210024	2021/01/08	Vicky	$\triangle C$ X1
D	C210561	2021/04/12	Vicky	$\triangle D$ X3

$\triangle B$ M12B-XXBMMB-SL7001

XX: No. Of Pin

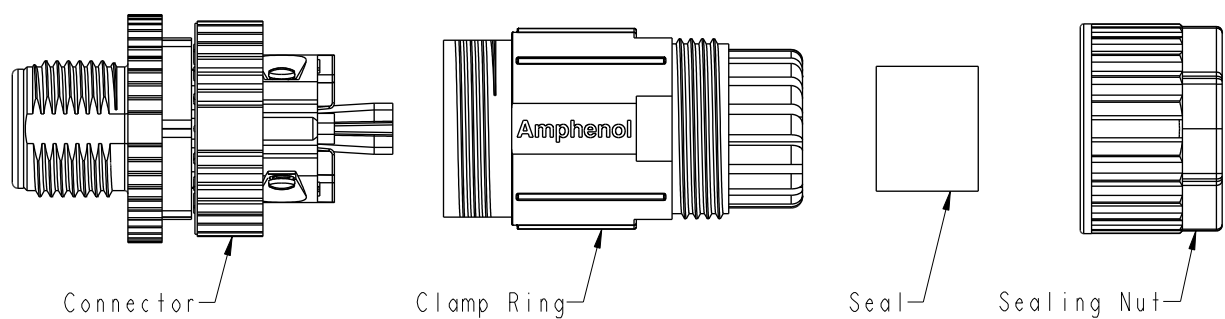

5P

Pin Assignments
Front View

- Note:
- * RoHS Compliant
 - * $\varnothing$ Important Dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - $\triangle C$ Nut: Metal
 - O-Ring: Rubber, Gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 8.0\text{mm}$
 - * One set unassembled in one pe bag

UNIT: mm			TITLE N SEN, M12 B, SCREW CABLE W/O SR, M, M, FI SCREW		
TOLERANCE			SCALE 1:1	SIZE A4	SHEET 1 OF 1
.X .XX .XXX ANGLES	± 0.25 ± 0.1 ± 0.05 $\pm 1^\circ$		REV. D	WC-REV. A.3	QC: Inspection item

Amphenol LTW		ITEM NO	DRAWN BY	DATE
安費諾亮泰企業股份有限公司		DWG. NO	Mila	2015-10-09
		$\triangle B$ M12B-XXBMMB-SL7001	CHECKED BY	DATE
		CUSTOMER	Cary	2015-10-09
		ALTW	APPROVED BY	DATE
			Jerry	2015-10-09