



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201473	2020/09/24	Vicky	X4
E	C210024	2021/01/08	Vicky	X1
F	C210542	2021/02/22	Ruru	X3

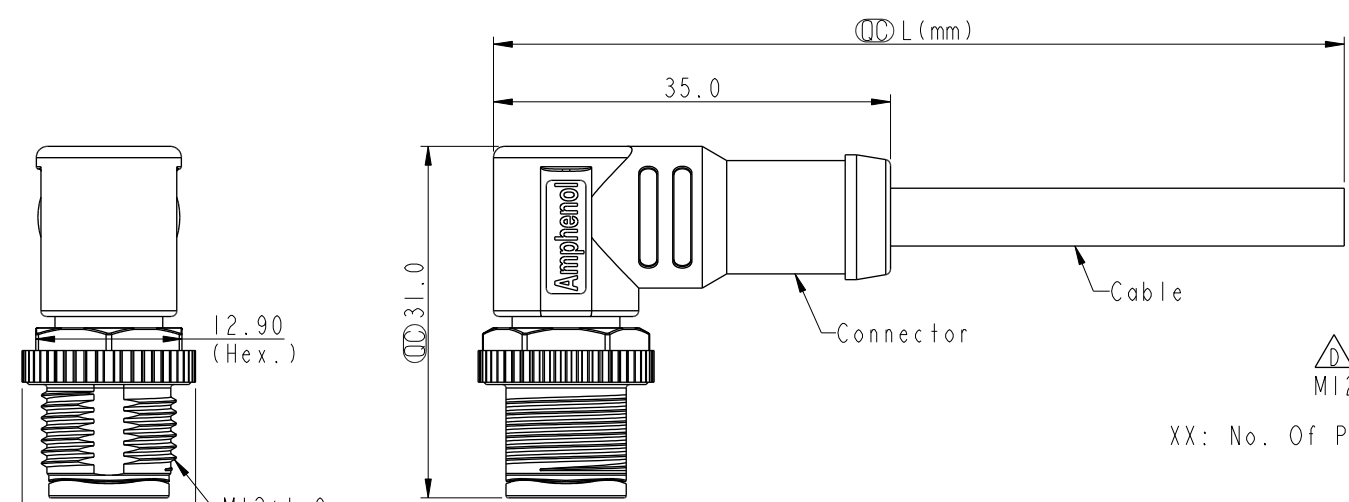

MI2B-XXBMMM-SR8BXX
XX: No. Of Pin
XX: 01~99Meters
01: 01Meter
02: 02Meters
...
99: 99Meters

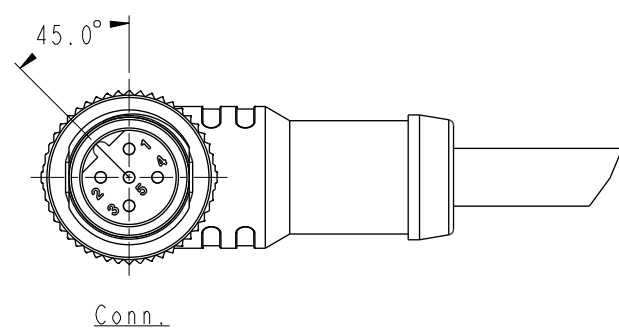

Note:

- * RoHS Compliant
- * Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
- * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Metal
Outer mold: Thermoplastic, Black
- * Cable: UL20549, 22#*5C, OD=4.4mm, PUR Jacket, Black
- * Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

Pin Out	5 4 3 2 1	Gray Black Blue White Brown	灰 黑 藍 白 棕
	Pin #	Wire	
Conn.			
	5P		

Pin Assignments Front View	
UNIT:mm	
TOLERANCE	
±0.5mm	

TITLE N SEN, MI2 B, SCREW CABLE W/O SR, M, M, MOLDING			
SCALE 3:2	SIZE A4	SHEET 1	OF 1
REV. F	WC-REV. A.2	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2019-01-21
DWG NO MI2B-XXBMMM-SR8BXX	CHECKED BY Rita	DATE 2019-01-21
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-01-21