


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1690052-053	2016/09/05	Yulong_wang	Add 3, 4 Pin & IP69K.
D	C201469	2020/09/24	Ruru	△D X5
E	C210309	2021/02/25	Ruru	△E X2






Recommended
Panel Cut-Out




MI2B-XXPFFS-SF8001

XX: No. Of Pin

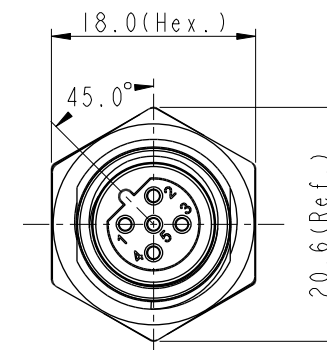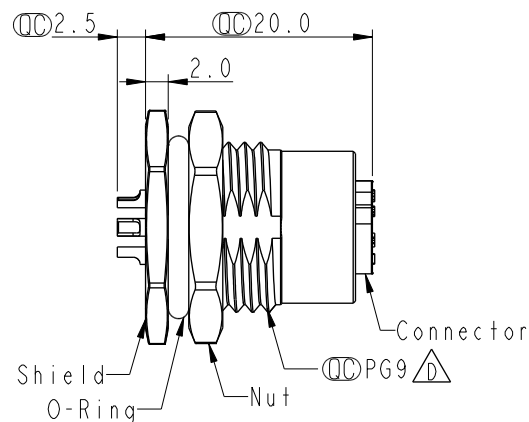


Note:


- * RoHS Compliant
- * Ⓢ Important dimension
- * △C * Waterproof rate: IPX8, unmated 1m/24h
IPX9K, unmated
- * Connector
- * Housing: Thermoplastic, Black
- * Pin: Copper alloy, Gold plated
- * O-Ring: Rubber, Green
- * Shield: Metal
- * Nut: Metal
- * O-Ring: Rubber, Black
- * For panel thickness max: 4.5mm
- * Nut is packed separately in pe bag



3P




4P



5P

Pin Assignment Front View

UNIT:mm



TITLE

N SEN, MI2 B, SCREW
RECEPTACLE, F, F, SOLDER △E

SCALE 2:1

SIZE A4

SHEET 1 OF 1

REV. E

WC-REV. A.5

Ⓢ Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG. NO

△MI2B-XXPFFS-SF8001

CUSTOMER

ALTW

DRAWN BY

Yulong_wang

CHECKED BY

Jinhai

APPROVED BY

Jerry

DATE

2016-09-05

DATE

2016-09-05

DATE

2016-09-05