



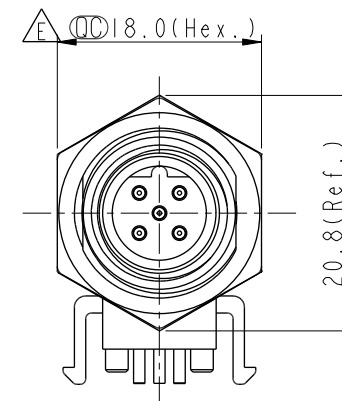


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201473	2020/09/24	Vicky	△C X4
D	C210024	2021/01/12	Vicky	△D X2
E	C210309	2021/02/26	Ruru	△E X5

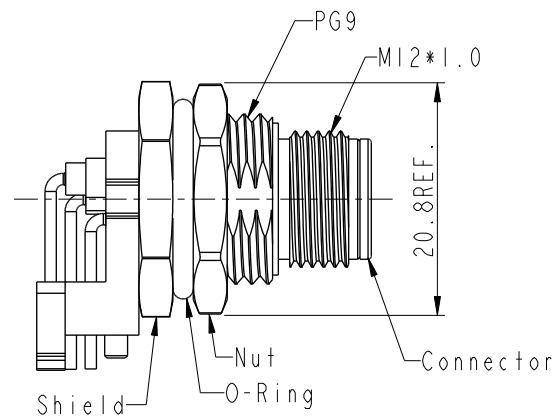


Recommended
Panel Cut-Out


△C
MI2B-XXPMMR-SF8001
XX: No. Of Pin



Pin Assignment
Front View

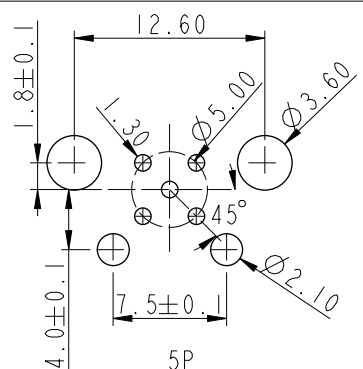


PCB Layout

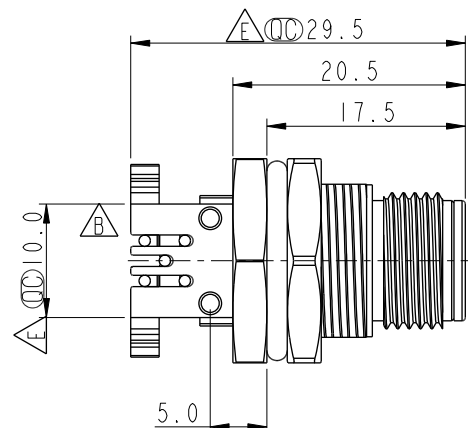

- △C△E Note:
- * RoHS Compliant
 - * ⌀ Important dimension
 - * Waterproof rate: IPX8, unmated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Shield: Metal
 - Nut: Metal
 - O-Ring: Rubber, Black
 - * For panel thickness max: 4.5mm
 - * For pcb thickness max: 1.6mm
 - * Nut is packed separately in pe bag

UNIT:mm



TITLE			
N SEN, MI2 B, SCREW RECEPTACLE, M, M, PCB R △C△E			
SCALE	SIZE	SHEET	
3:2	A4	1 OF 1	
REV.	WC-REV.	QC: Inspection item	
E	A.2		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Nan_Su	2019-08-14
DWG. NO	CHECKED BY	DATE
△C MI2B-XXPMMR-SF8001	Feng_Li	2019-08-14
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019-08-14