
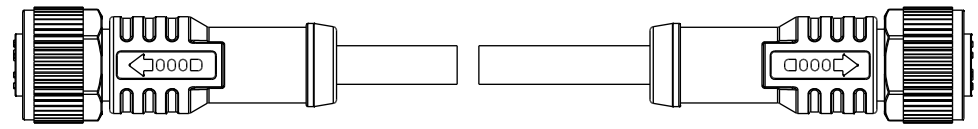

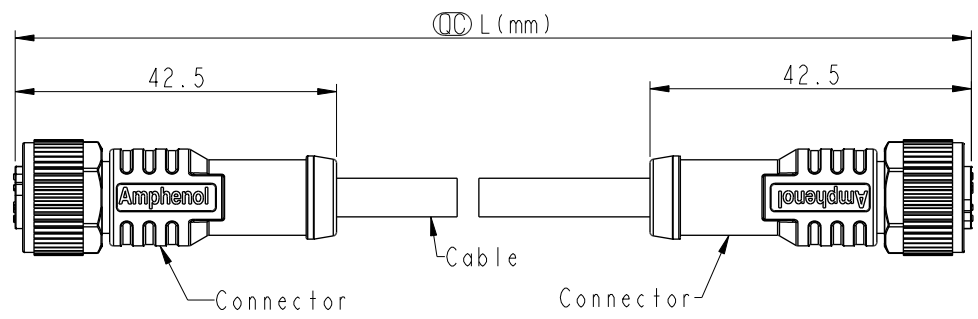


1		2		3		4		5		6		7		8	
								REV.	ECN NO.	DATE	SIGN	DESCRIPTION			
								B	C201740	2020/11/10	Vicky	△B X3			
								C	C210024	2021/01/12	Vicky	△C X1			
								D	C210235	2021/02/04	Ruru	△D X2			

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201740	2020/11/10	Vicky	△ B X3
C	C210024	2021/01/12	Vicky	△ C X1
D	C210235	2021/02/04	Ruru	△ D X2




△ B
M12BXXFL-12BFL-SBXXX

XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 1 Meter
 002: 2 Meters
 :
 099: 99 Meters

Note: △ B △ C △ D
 * RoHS Compliant
 * (QC) Important dimension
 * Waterproof rate: IPX8, mated 1m/24h
 IPX9K, mated
 * Connector:
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Green
 Nut: Metal
 Outer mold: Thermoplastic, Black
 * Cable: UL20549, 22#*5C, OD=4.4mm, PUR Jacket, Black
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

Pin Out	5	Gary	灰
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
Pin #	Wire		

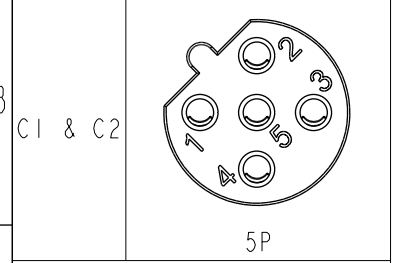

Pin Assignments Front View

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE ACC, SEN, B Code, DB-ENDED FF			
SCALE 1:2	SIZE A4	SHEET 1	OF 1
REV. D	WC-REV.	(QC): Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2018-12-07
DWG NO △ B M12BXXFL-12BFL-SBXXX	CHECKED BY Rita	DATE 2018-12-07
CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-07