


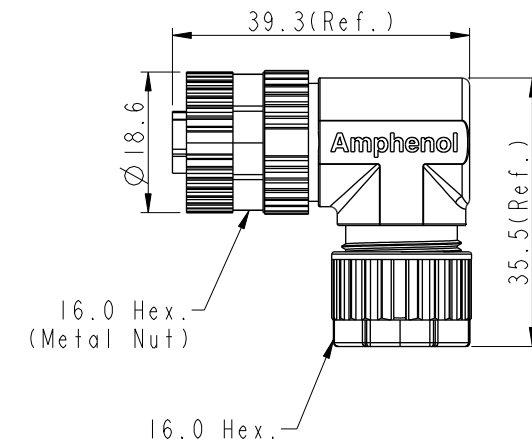



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201469	2020/09/25	Ruru	 X4
E	C210561	2021/04/12	Vicky	 X2
F	C210977	2021/06/23	Vicky	 X1

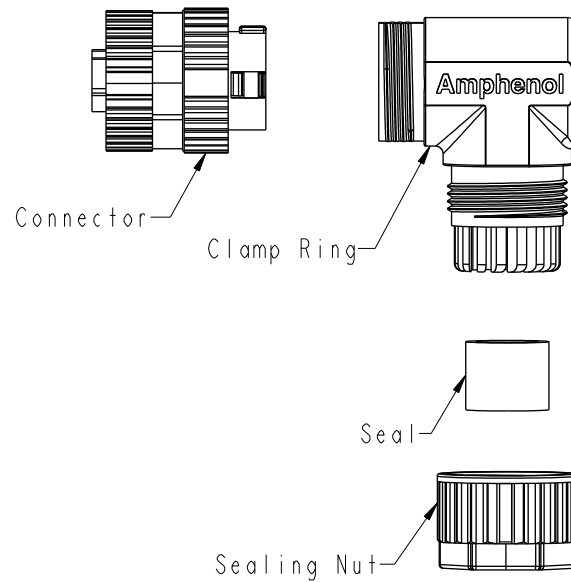

4P

Pin Assignments Front View

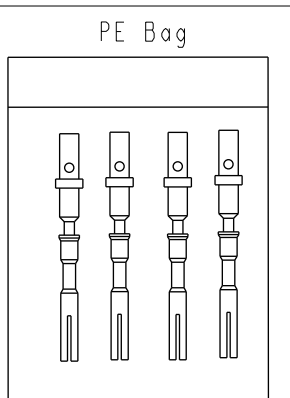

 MI2D-XXBFFC-SR7001

XX: No. Of Pin_____

$\triangle E$

Note:

- * RoHS Compliant
- *  Important Dimension
- * Waterproof rate: IPX7, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Extension Nut: Thermoplastic, Black
- Nut: Metal
-  O-Ring: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
-  * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} - \varnothing 7.0\text{mm}$
- * Applicable wire gauge: 20AWG~24AWG
- * One set unassembled in one pe bag



A triangle with the letter 'D' inside it.

* Clamp Ring: Thermoplastic, Black

* Sealing Nut: Thermoplastic, Black


* Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7$

Applicable wire gauge: 20AWG~24AWG

* One set un-assembled in one ne bag

* One set unassembled in one pe bag

UNIT: mm



TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$



TITLE		N SEN, M12 D, SCREW			
CABLE W/O SR, F, F, FI/PANEL CRIMP					
SCALE	Free	SIZE	A4	SHEET	OF 1
REV.	F	WC-REV.	.0	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Xiaofeng	2019/12/18
DWG NO	CHECKED BY	DATE
M12D-XXBFFC-SR7001	Li-Feng	2019/12/18
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019/12/18