

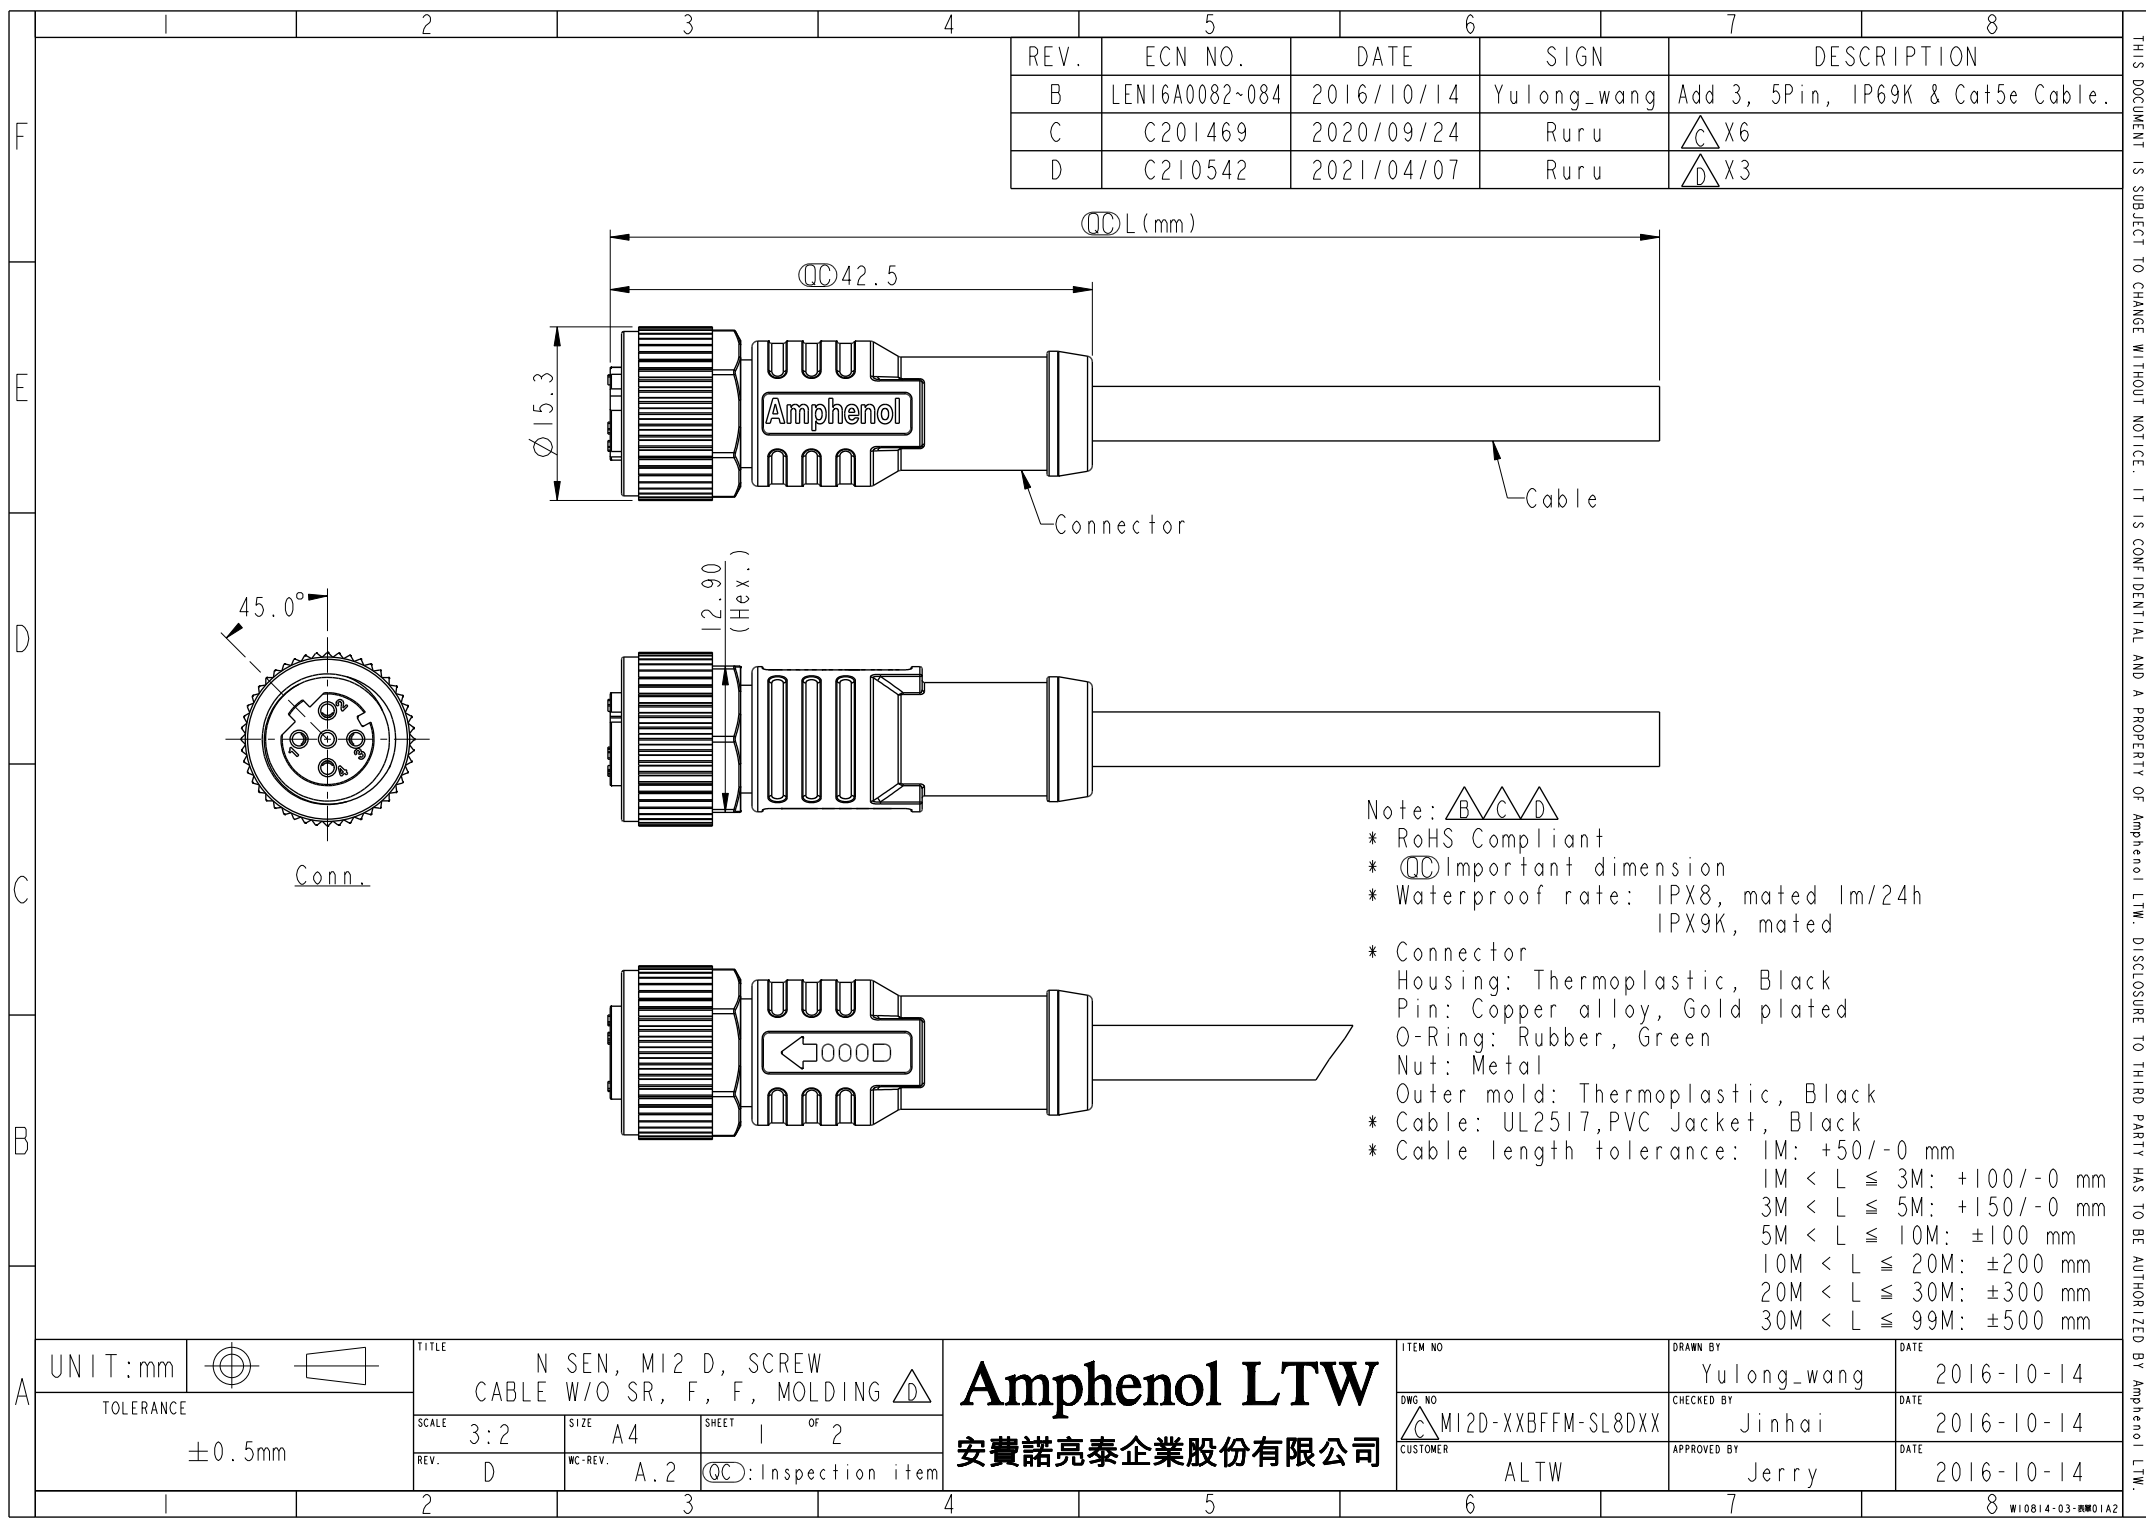
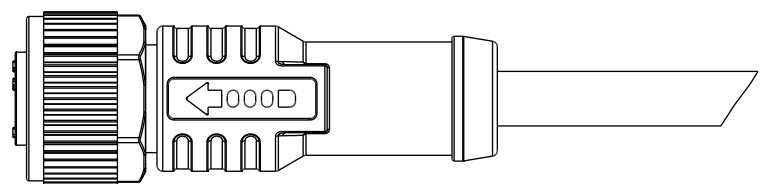
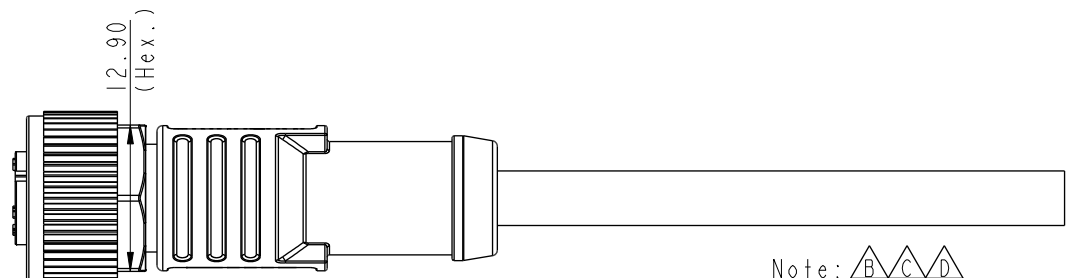




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN16A0082~084	2016/10/14	Yulong_wang	Add 3, 5Pin, IP69K & Cat5e Cable.
C	C201469	2020/09/24	Ruru	$\triangle C$ X6
D	C210542	2021/04/07	Ruru	$\triangle D$ X3

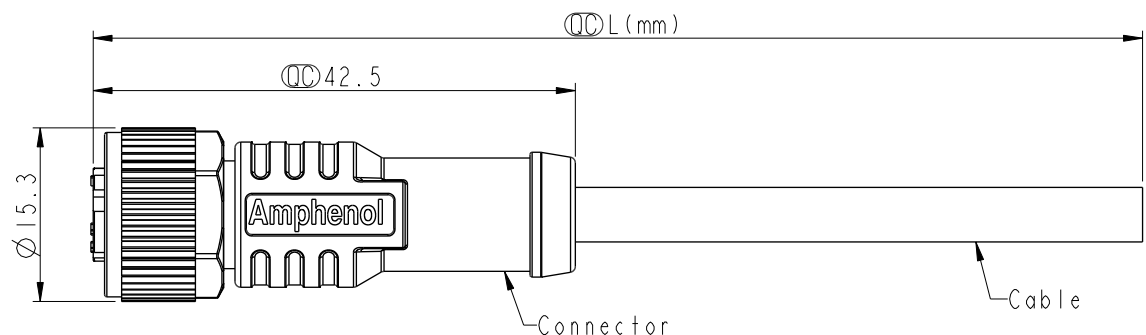

Note: $\triangle B$ $\triangle C$ $\triangle D$

- * RoHS Compliant
- * $\varnothing$ Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
- * Cable: UL2517, PVC Jacket, Black
- * Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT: mm		TITLE	
TOLERANCE		N SEN, M12 D, SCREW	
±0.5mm		CABLE W/O SR, F, F, MOLDING $\triangle D$	
SCALE	3:2	SIZE	A4
REV.	D	SHEET	1 OF 2
WC-REV.	A.2	QC-REV.	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY	DATE
DWG. NO.	Yulong_wang	2016-10-14
CUSTOMER	CHECKED BY	DATE
ALTW	Jinhai	2016-10-14
	APPROVED BY	DATE
	Jerry	2016-10-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

```
-XX:01~99Meters
01:01Meter
02:02Meters
.
99:99Meters
```

Diagram showing triangle B on top of triangle C.

UNIT: mm		TITLE N SEN, M12 D, SCREW CABLE W/O SR, F, F, MOLDING 			
TOLERANCE	$\pm 0.5\text{mm}$	SCALE	SIZE	SHEET	
		3:2	A4	2 OF 2	
		REV.	NC-REV.	QC: Inspection item	
		D	A.2		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Yulong-wang	2016-10-14
DWG NO	CHECKED BY	DATE
 M12D-XXBFFM-SL8DXX	Jinhai	2016-10-14
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2016-10-14