
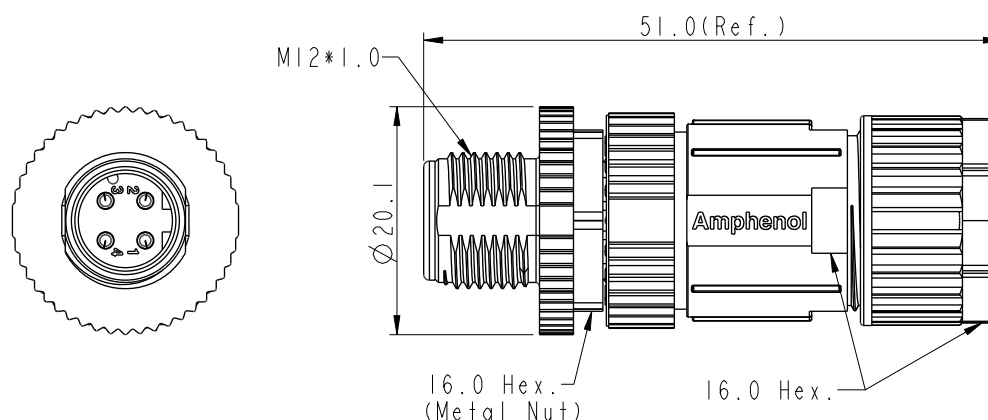


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201542	2020/10/07	Vicky	X4
C	C210025	2021/01/19	Vicky	X1
D	C210561	2021/04/13	Vicky	X3


M12D-XXBMMB-SL7001

XX: No. Of Pin

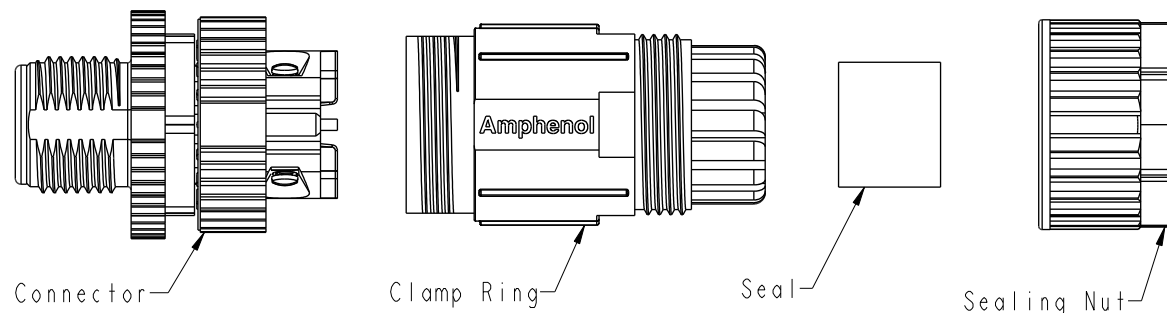

Note:


- * RoHS Compliant
- * Important Dimension
- * Waterproof rate: IPX7, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
- Nut: Metal
- O-Ring: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 8.0\text{mm}$
- * One set unassembled in one pe bag



4P

Pin Assignments
Front View

UNIT:mm



TOLERANCE
.X ± 0.25
.XX ± 0.1
.XXX ± 0.05
ANGLES $\pm 1^\circ$



TITLE N SEN, M12 D, SCREW CABLE W/O SR, M, M, FI SCREW			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV. A.2	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Mila	DATE 2015-10-12
DWG. NO. M12D-XXBMMB-SL7001	CHECKED BY Cary	DATE 2015-10-12
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-10-12