


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1690143~144	2016/08/23	Yulong_wang	Add 3, 5 Pin & IP69K.
D	C201469	2020/09/28	Ruru	$\triangle D$ X5
E	C210309	2021/03/03	Ruru	$\triangle E$ X2







Recommended
Panel Cut-Out




MI2D-XXPFFS-SH8002


XX: No. Of Pin

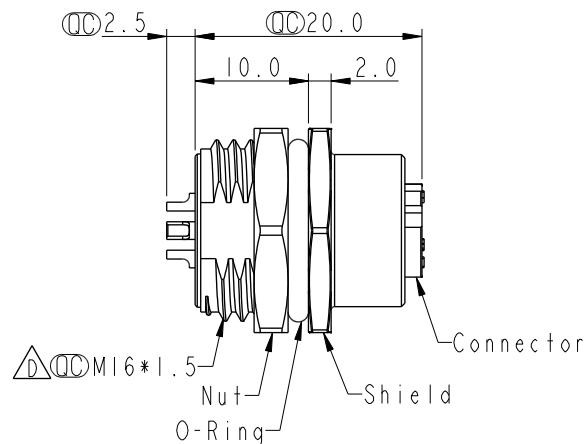

3P




4P



5P


Pin Assignment Front View



Note:

- * RoHS Compliant
- * $\varnothing$ Important dimension
- * $\triangle C$ Waterproof rate: IPX8, unmated 1m/24h
IPX9K, unmated
- * Connector
- * Housing: Thermoplastic, Black
- * Pin: Copper alloy, Gold plated
- * O-Ring: Rubber, Green
- * Shield: Metal
- * Nut: Metal
- * O-Ring: Rubber, Black
- * For panel thickness max: 4.5mm
- * Nut is packed separately in pe bag

UNIT:mm



TITLE

N SEN, MI2 D, SCREW
RECEPTACLE, F, F, SOLDER $\triangle E$

SCALE

2:1

SIZE

A4

SHEET

1

OF

1

REV.

E

WC-REV.

A.5

$\varnothing$ Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG. NO

$\triangle A$ MI2D-XXPFFS-SH8002

CUSTOMER

ALTW

DRAWN BY

Yulong_wang

CHECKED BY

Jinhai

APPROVED BY

Jerry

DATE

2016-08-23

DATE

2016-08-23

DATE

2016-08-23