






REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201542	2020/10/07	Vicky	△C X4
D	C210025	2021/01/19	Vicky	△D X2
E	C210309	2021/03/03	Ruru	△E X2

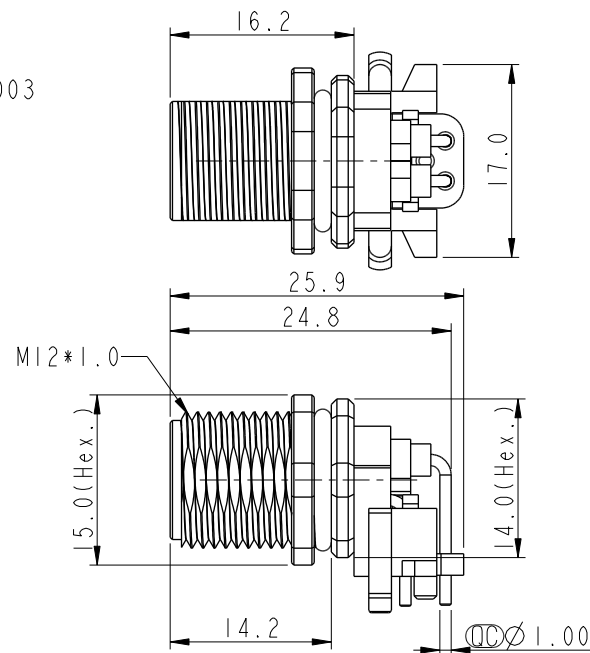


Recommended
Panel Cut-Out


△C MI2D-XXPMMR-SF7003
XX: No. Of Pin

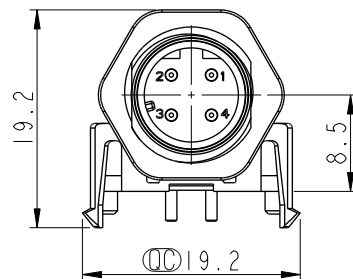

Pin Assignment
Front View

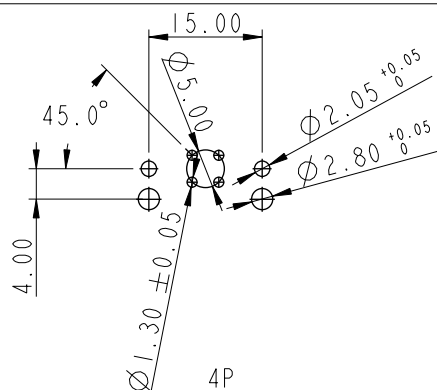


PCB Layout

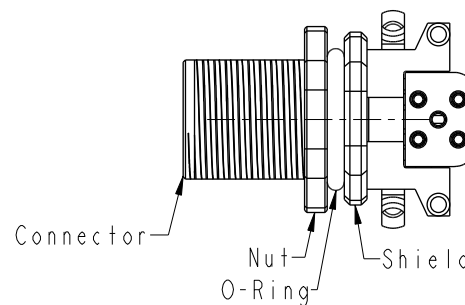

Note: △C △E

- * RoHS Compliant
- * Ⓢ Important dimension
- * Waterproof rate: IPX7, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Black
- △D* Shield: Metal
- △D* Nut: Metal
- * O-Ring: Rubber, Gray
- * For panel thickness max: 3.0mm
- △B* For pcb thickness max: 1.6mm
- * Nut is packed separately in pe bag

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE N SEN, MI2 D, SCREW RECEPTACLE, M, M, PCB R △C △E			
SCALE 3:2	SIZE A4	SHEET 1	OF 1
REV. E	WC-REV. A.1	Ⓢ Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Yulong_wang	DATE 2016-11-10
DWG NO △C MI2D-XXPMMR-SF7003	CHECKED BY Jinhai	DATE 2016-11-10
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-11-10