

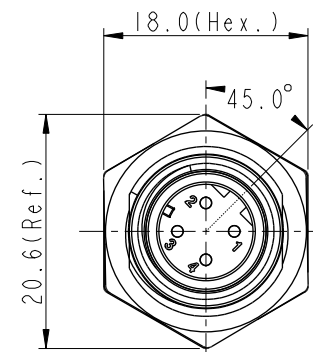
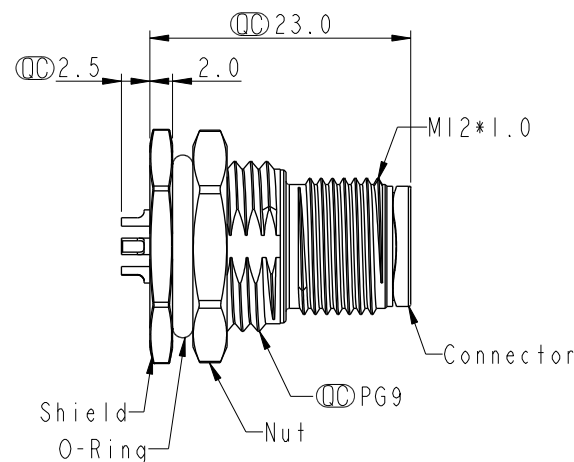




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201542	2020/10/07	Vicky	 X3
E	C210025	2021/01/19	Vicky	 X2
F	C210309	2021/03/03	Ruru	 X2

 MI2D-XXPMMS-SF8001


XX: No. Of Pin

Recommended
Panel Cut-Out

3P



4P




5P

Pin Assignment Front View

-  Note:
- * RoHS Compliant
 - *  Important dimension
 -  * Waterproof rate: IPX8, unmated 1m/24h
IPX9K, unmated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 -  * Shield: Metal
 -  * Nut: Metal
 - * O-Ring: Rubber, Black
 - * For panel thickness max: 4.5mm
 - * Nut is packed separately in pe bag

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE

N SEN, MI2 D, SCREW
RECEPTACLE, M, M, SOLDER 

SCALE

2:1

SIZE

A4

SHEET

1

OF

1

REV.

F

WC-REV.

A.5



: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG. NO

 MI2D-XXPMMS-SF8001

CUSTOMER

ALTW

DRAWN BY

Yulong_wang

CHECKED BY

Jinhai

APPROVED BY

Jerry

DATE

2016-08-24

DATE

2016-08-24

DATE

2016-08-24