


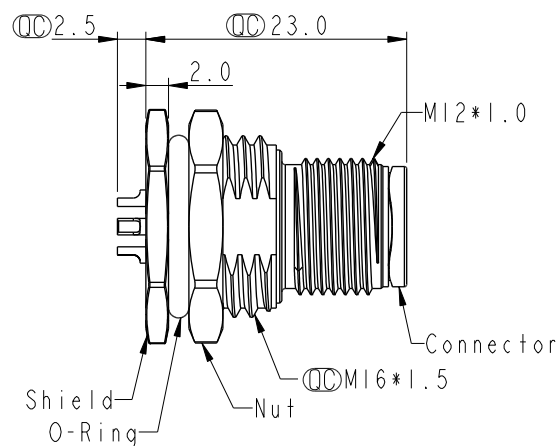


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201542	2020/10/07	Vicky	 X3
E	C210025	2021/01/19	Vicky	 X2
F	C210309	2021/03/03	Ruru	 X2




MI2D-XXPMMS-SF8002

XX: No. Of Pin


Recommended
Panel Cut-Out

Note:


- * RoHS Compliant
- *  Important dimension
-  * Waterproof rate: IPX8, unmated 1m/24h
IPX9K, unmated
- * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
-  * Shield: Metal
-  * Nut: Metal
- * O-Ring: Rubber, Black
- * For panel thickness max: 4.5mm
- * Nut is packed separately in pe bag



3P



4P




5P

Pin Assignment Front View



UNIT:mm



TITLE

N SEN, M12 D, SCREW
RECEPTACLE, M, M, SOLDER 

SCALE

2:1

SIZE

A4

SHEET

OF

1

REV.

F

WC-REV.

A.5

 Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

 MI2D-XXPMMS-SF8002

CUSTOMER

ALTW

DRAWN BY

Yulong_wang

CHECKED BY

Jinhai

APPROVED BY

Jerry

DATE

2016-08-24

DATE

2016-08-24

DATE

2016-08-24