


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201542	2020/10/07	Vicky	X3
E	C210025	2021/01/19	Vicky	X2
F	C210309	202103/03	Ruru	X2







Recommended
Panel Cut-Out




M12D-XXPMMS-SH8001


XX: No. Of Pin

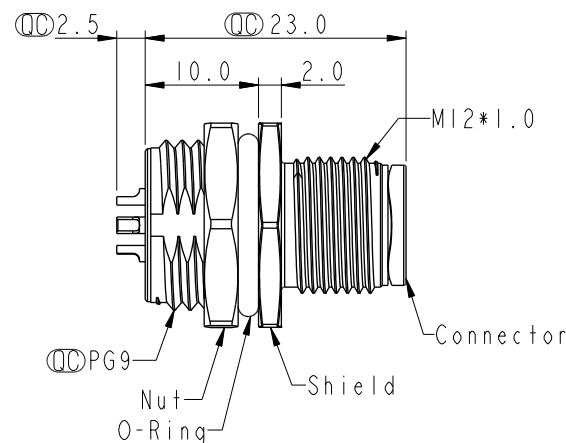


- Note:
- * RoHS Compliant
 - * Important dimension
 - * Waterproof rate: IPX8, unmated 1m/24h IPX9K, unmated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - * Shield: Metal
 - * Nut: Metal
 - * O-Ring: Rubber, Black
 - * For panel thickness max: 4.5mm
 - * Nut is packed separately in pe bag



3P



4P




5P

Pin Assignment Front View



UNIT:mm



TITLE N SEN, M12 D, SCREW RECEPTACLE, M, M, SOLDER			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. F	WC-REV. A.5	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Yulong_wang	DATE 2016-08-23
DWG NO M12D-XXPMMS-SH8001	CHECKED BY Jinhai	DATE 2016-08-23
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-08-23