
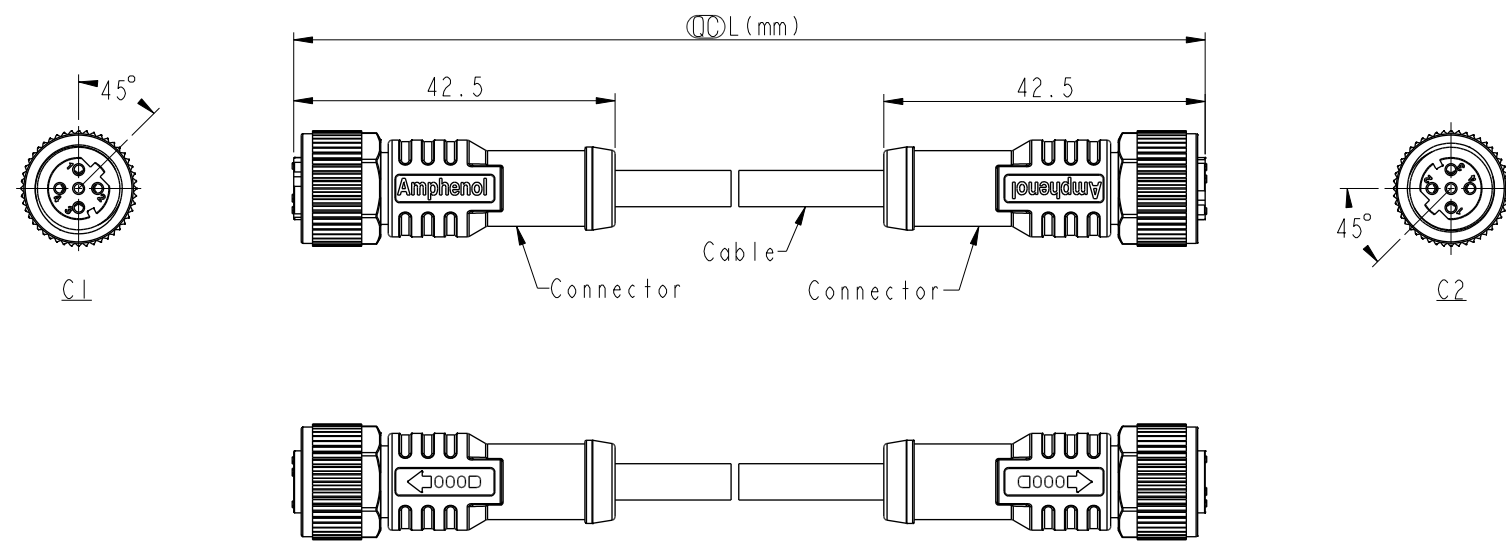


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201784	2020/11/12	Ruru	 X3
C	C210235	2021/03/25	Ruru	 X2



Pin Out	5 -- 4 Black 3 Blue 2 White 1 Brown	黑 藍 白 棕
Pin #	Wire	
CI & C2		4P

MI2DXXFL-12DFL-SBXXX

XX: No. Of Pin

XXX: 0.5~99Meters
A05: 0.5 Meter
1: 01 Meter
2: 02 Meters
:
99: 99 Meters

Note:  

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
- * Connector:
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
- * Cable: UL20549, 22#*4C, OD=4.0mm, PUR Jacket, Black
- * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT:mm			TITLE	ACC, SEN, D Code, DB-ENDED FF		ITEM NO	DRAWN BY	DATE
TOLERANCE	± 0.5 mm		SCALE	1:2	SIZE	A4	SHEET	1 OF 1
REV.	C	WC-REV.	A.5	 Inspection item		DWG NO	CHECKED BY	DATE
						 MI2DXXFL-12DFL-SBXXX	Rita	2018-12-11
						CUSTOMER	APPROVED BY	DATE
						ALTW	Max	2018-12-11

Amphenol LTW
安費諾亮泰企業股份有限公司