




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-11-20	Allen Pan	Rev.01 To Rev.A
B	C210542	2021-04-09	Ruru	$\triangle B$ X3

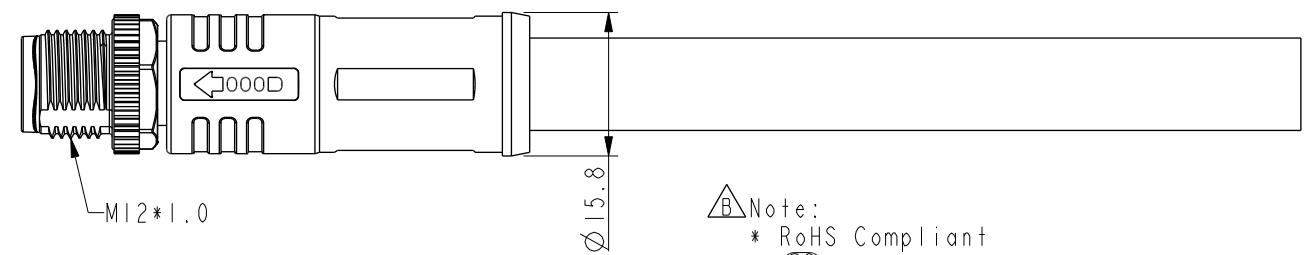


Conn.

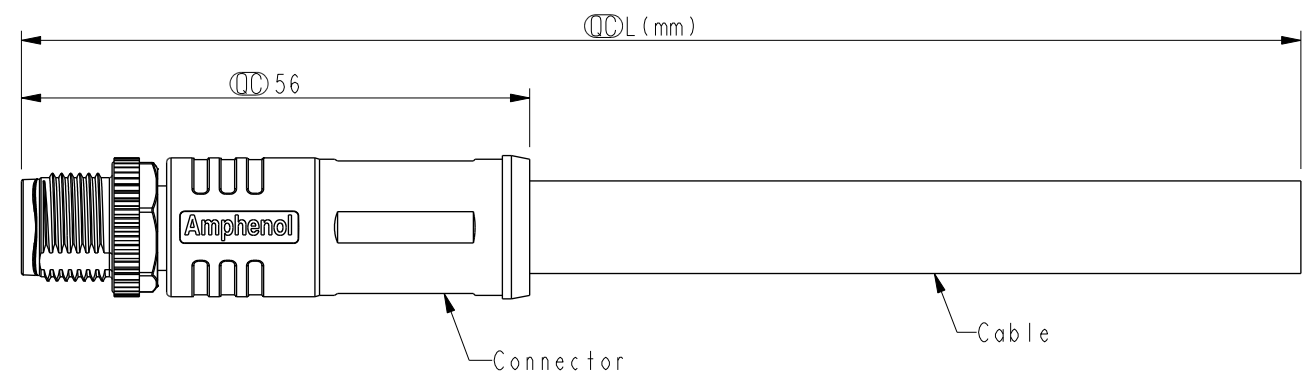

$\triangle B$ MI2L-XXBMEM-SL8HXX
XX: No. Of Pin
XX: 01~99Meters
01: 01Meter
02: 02Meters
...
99: 99Meters

$\triangle B$ Note:
* RoHS Compliant
* CC Important dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Metal
Outer mold: Thermoplastic, Black
* Cable: UL20233, 14#*5C, OD=10.2mm, PU Jacket, Black
* Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

Pin Out	4 Black 黑
	3 Blue 藍
	2 White 白
	1 Brown 棕
	FE Gray 灰
Pin #	Wire

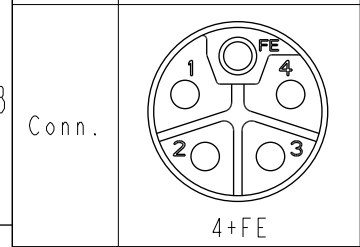

Pin Assignments Front View

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	N SEN, MI2 L, SCREW CABLE W/O SR, M, M PWR+F GND, MOLDING
SCALE	6:5	SIZE A4
REV.	B	WC-REV. A.1
		CC : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Allen Pan	2020-11-20
CUSTOMER	Sam Ho	DATE
ALTW	Fred Lee	2020-11-20