

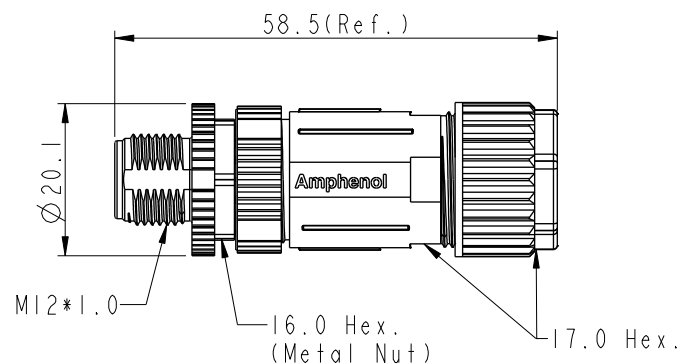


XX: No. Of Pin

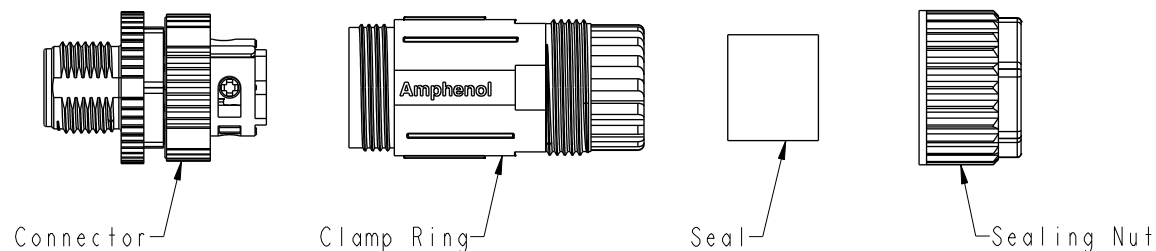

Pin Assignments Front View

UNIT: mm



TOI FRANCE

.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE			N SEN, M12 S, SCREW			
CABLE			W/O SR, M, M, FI		SCREW IN	
SCALE		SIZE		SHEET		OF
1 : 1		A4		1		1
REV.		WC-REV.		Inspection item		
C		A. 1		 : Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG. NO	Cary	2015-03-26
 M12S-XXBMMB-SL7002	CHECKED BY	DATE
CUSTOMER	Lu Di	2015-03-26
ALTW	APPROVED BY	DATE
	Jerry	2015-03-26

Note:

- * RoHS Compliant
- *  Important Dimension
- * Waterproof rate: IPX7, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - Nut: Metal
 - O-Ring: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD: $\varnothing 8.0\text{mm} \sim \varnothing 10.0\text{mm}$
- * One set unassembled in one pe bag