





4		5		6		7		8	
△	REV.	ECN NO.	DATE	SIGN	DESCRIPTION				
	B	C210919	2021/06/15	Na Liu	△B	X	1		
	C	C211311	2021/08/16	Aber	△C	X	7		
	D	C220088	2022/02/12	Li Dai	△D	X	3		

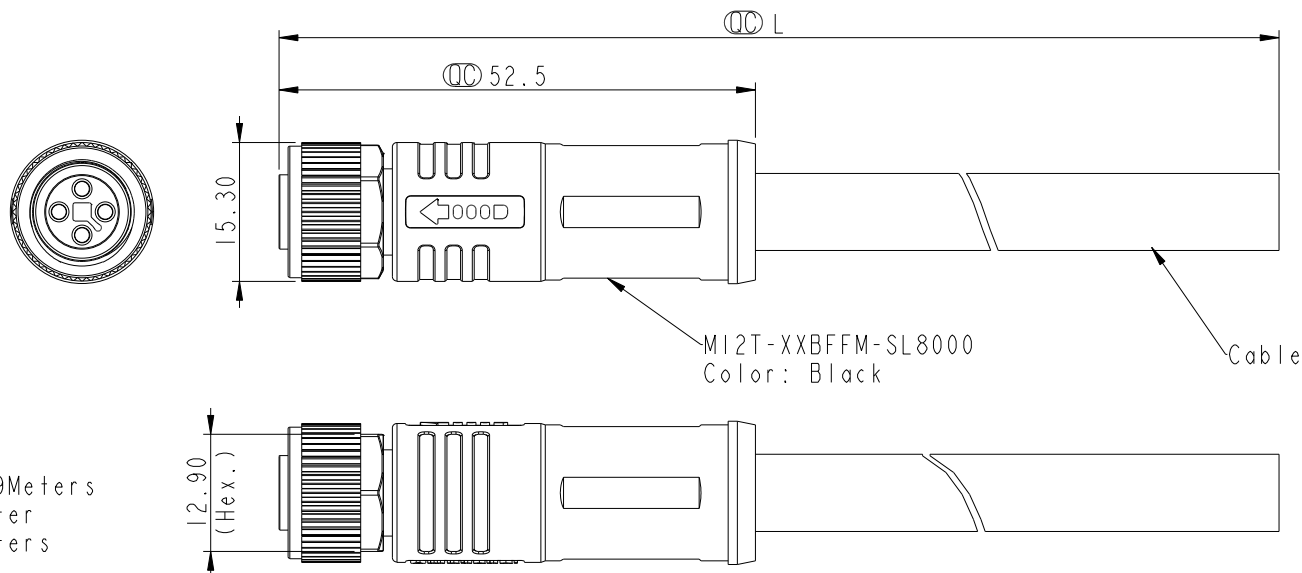

MI2T-XXBFFM-SL8HXX

XX: No. Of Pin ——— XX: 01~99Meters
01: 01Meter
02: 02Meters
:
:
99: 99Meters

4	- - -		4	Blue	藍		4	Blue	藍	
3	White	白	3	White	白		3	White	白	
2	- - -		2	- - -			2	Black	黑	
1	Brown	棕	1	Brown	棕		1	Brown	棕	
Pin #	Wire		Pin #	Wire			Pin #	Wire		



Note:

- * RoHS Compliant.
- *  Important Dimension.
- * Waterproof Rate: IPX8(Mated, 1M/24H).
- * Connector: Thermoplastic, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * O-Ring: Rubber, Green.
- * Screw Nut: Metal.
- * Outer Mold: Thermoplastic, Black.
- * Cable: UL20233, 16AWG, TPU Jacket, Black.
- * Cable Length Tolerance: 1M: +50/-0mm
 - 1M< L ≤3M: +100/-
 - 3M< L ≤5M: +150/-
 - 5M< L ≤10M: ±100m
 - 10M< L ≤20M: ±200
 - 20M< L ≤30M: ±300
 - 30M< L ≤99M: ±500

UNIT:mm			TITLE M12 T, SCREW, F CONN F PIN		
TOLERANCE ± 0.5			SCALE 6:5	SIZE A4	SHEET 1 OF 1
			REV. D	WC-REV. A.3	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Na Liu	2021/04/21
DWG NO	CHECKED BY	DATE
M12T-XXBFFM-SL8HXX	Fisher Wang	2021/04/21
CUSTOMER	APPROVED BY	DATE
ALTW	Max Yang	2021/04/21