


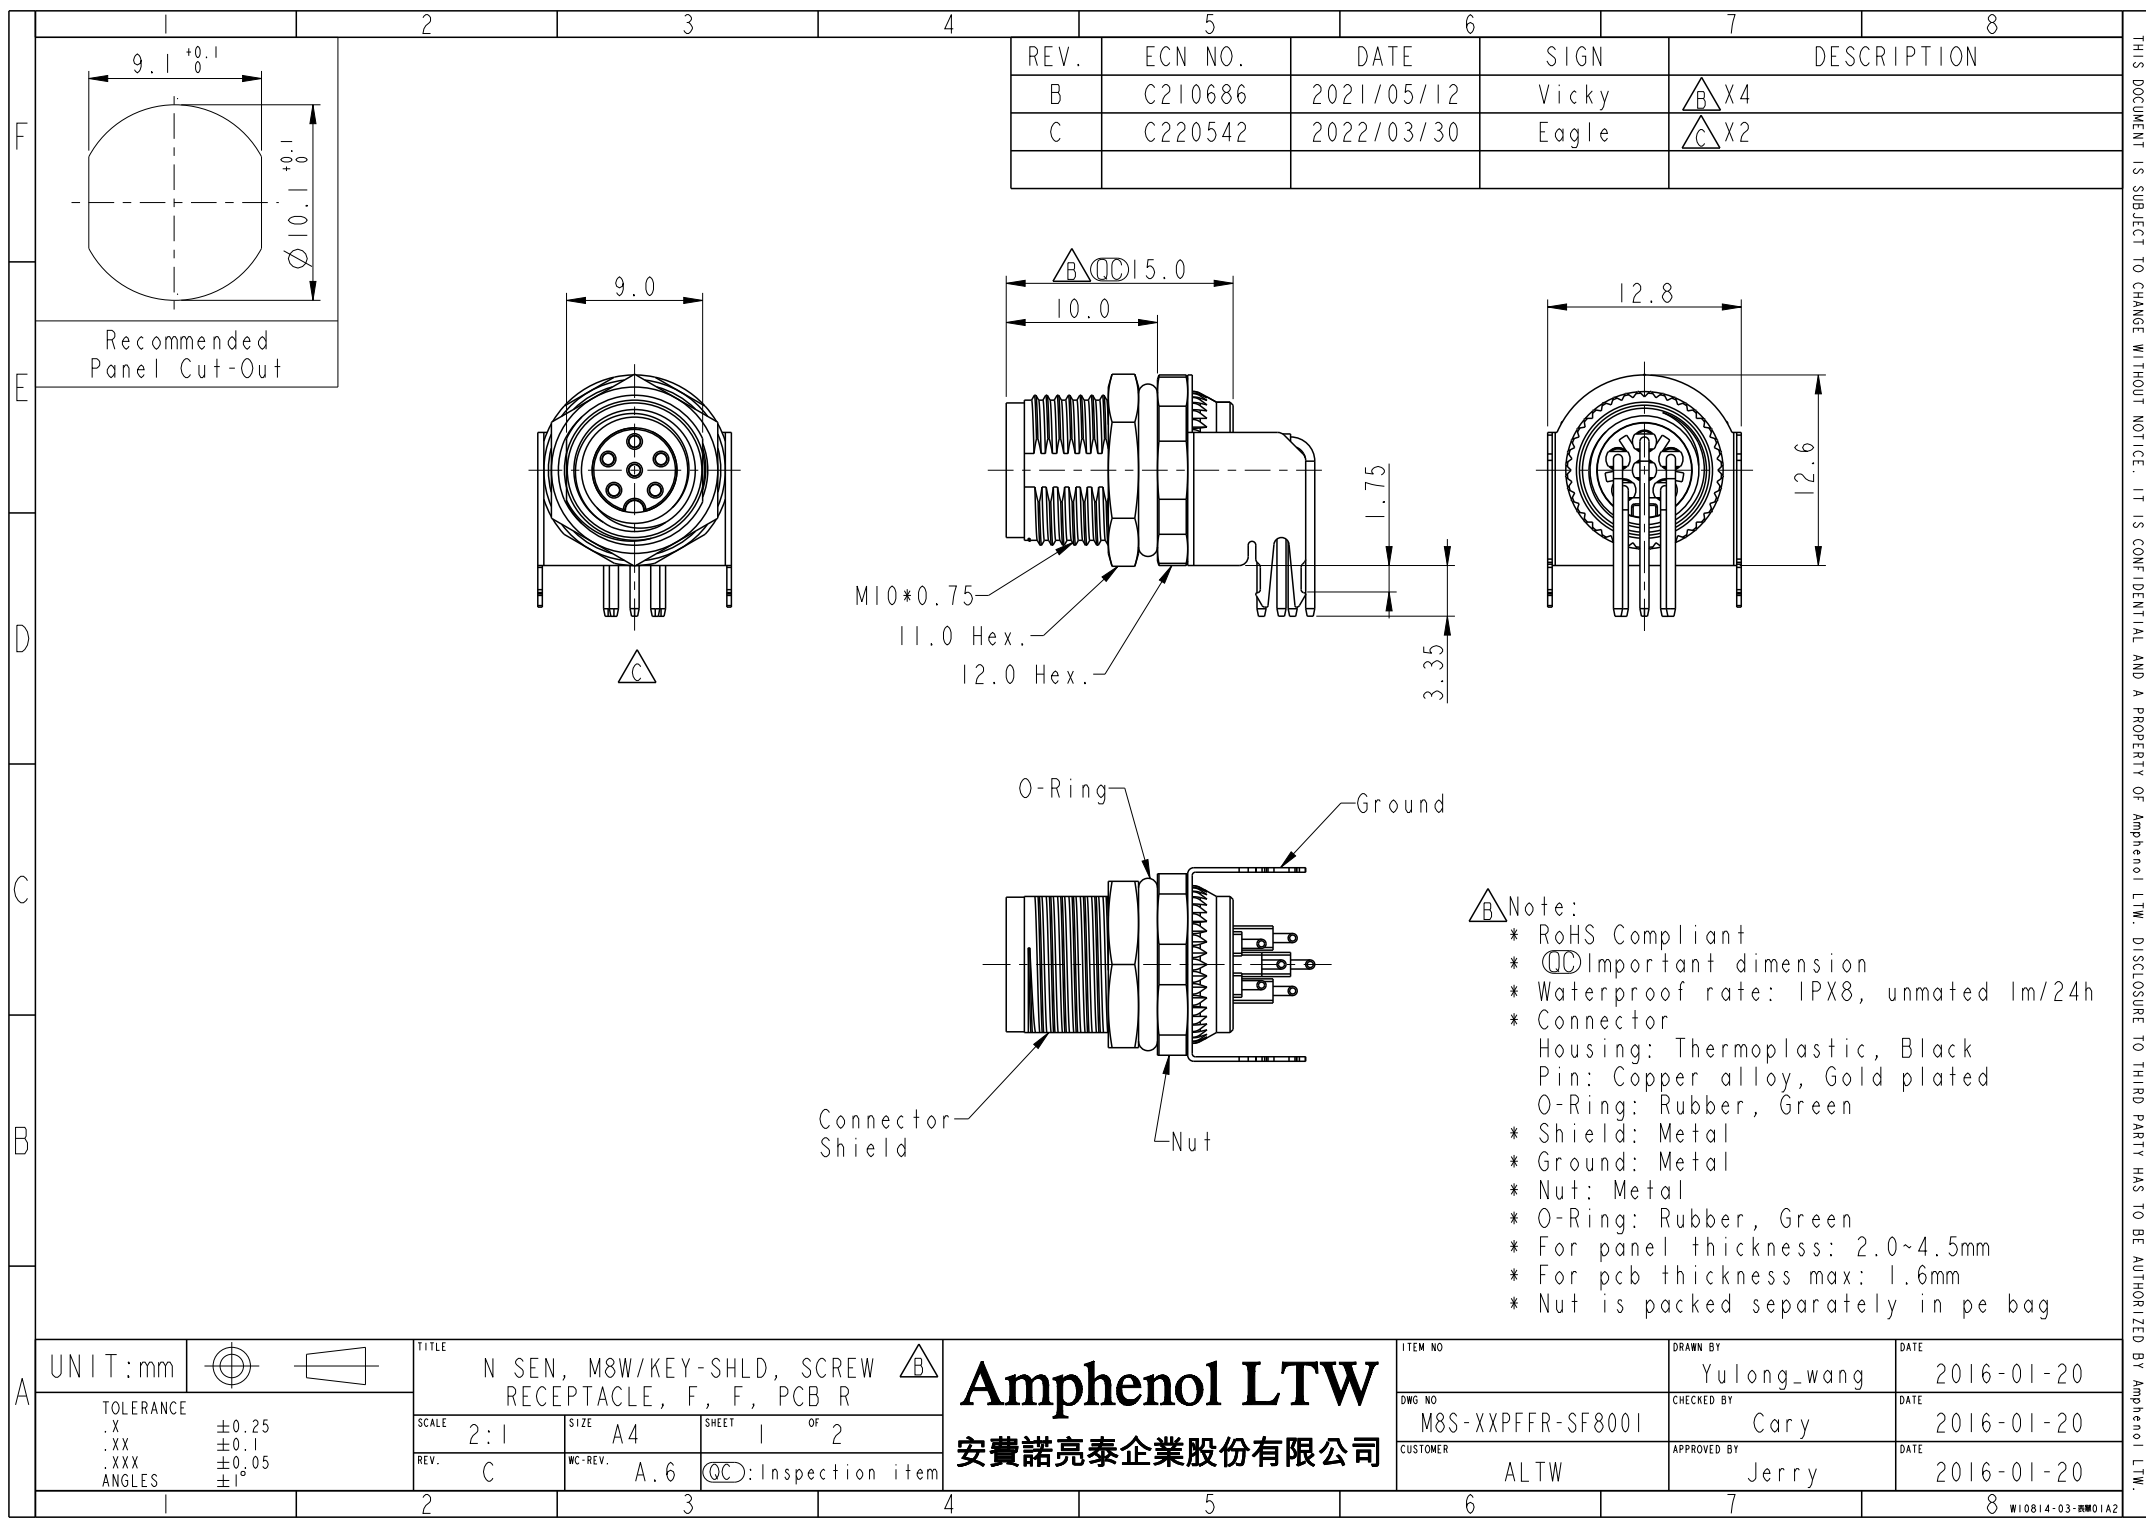

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210686	2021/05/12	Vicky	△B X4
C	C220542	2022/03/30	Eagle	△C X2

- △B Note:
- * RoHS Compliant
 - * Ⓞ Important dimension
 - * Waterproof rate: IPX8, unmated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - * Shield: Metal
 - * Ground: Metal
 - * Nut: Metal
 - * O-Ring: Rubber, Green
 - * For panel thickness: 2.0~4.5mm
 - * For pcb thickness max: 1.6mm
 - * Nut is packed separately in pe bag

UNIT:mm		TITLE	
TOLERANCE		N SEN, M8W/KEY-SHLD, SCREW RECEPTACLE, F, F, PCB R	
.X	±0.25	SCALE	2:1
.XX	±0.1	SIZE	A4
.XXX	±0.05	SHEET	1 OF 2
ANGLES	±1°	REV.	C
		WC-REV.	A.6
		Ⓞ: Inspection item	

ITEM NO		DRAWN BY		DATE	
		Yulong_wang		2016-01-20	
DWG NO		CHECKED BY		DATE	
M8S-XXPFFR-SF8001		Cary		2016-01-20	
CUSTOMER		APPROVED BY		DATE	
ALTW		Jerry		2016-01-20	

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

C

B

M8S-XXPFFR-SF8001

XX: No. Of Pin

PCB EDGE

