

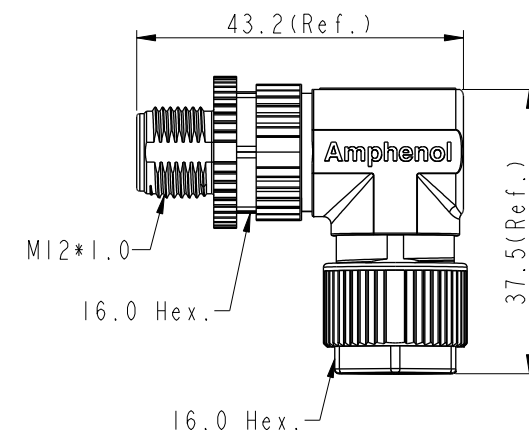




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C210076	2021/01/14	Vicky	 X2
E	C210561	2021/04/15	Vicky	 X3
F	C210977	2021/06/23	Vicky	 X1

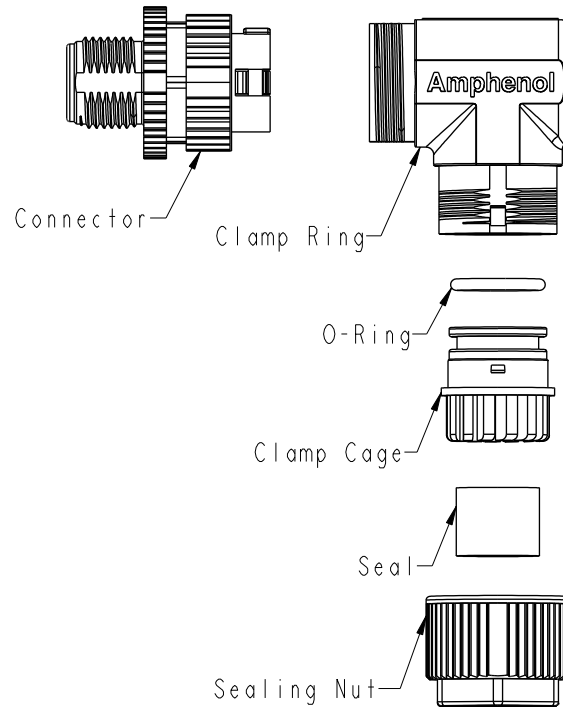

4P

Pin Assignments Front View

Front View

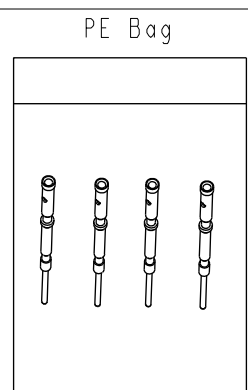

△ MSAS - XXBMMC - SR700

XX: No. Of Pin-

- Note:
- * RoHS Compliant
 - *  Important Dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Metal
 - Nut: Metal
 - O-Ring: Rubber, Gray
 - *  Clamp Ring: Metal
 - * O-Ring: Rubber, Gray
 - * Clamp Cage: Thermoplastic, Black
 - *  Sealing Nut: Metal
 - *  Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.0\text{mm}$
 - *  Applicable wire gauge: 20AWG~24AWG
 - * One set unassembled in one pe bag

UNIT:mm				TITLE N SEN, M12 A -SHLD, SCREW   CABLE W/O SR, M, M, FI/PANEL CRIMP			Amphenol LTW 安費諾亮泰企業股份有限公司			ITEM NO		DRAWN BY Xiaofeng		DATE 2020/03/09	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SCALE Free		SIZE A4				SHEET 1 OF 1		DWG NO  MSAS-XXBMMC-SR7001		CHECKED BY Li-Feng	
				REV. F		WC-REV. .0		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2020/03/09	