


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/04/30	Allen Pan	Rev.01 To Rev.A
B	C201747	2020/11/12	Vicky	△ X3
C	C210550	2021/04/07	Vicky	△ X2

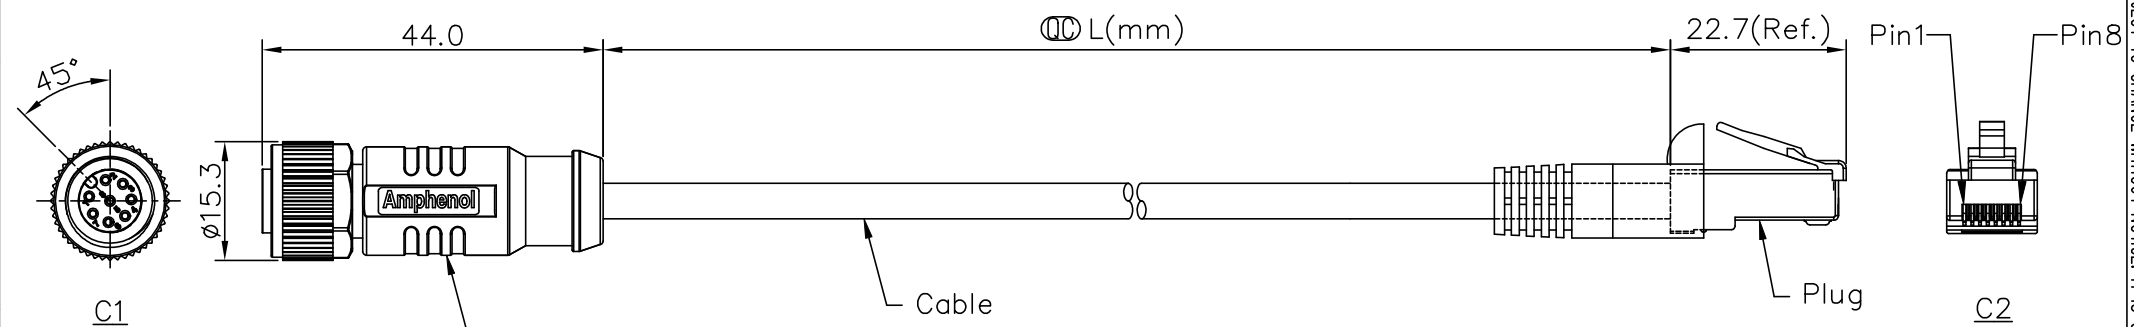

△ MSASXXFL-SPBML-SEXXX
XX: No. Of Pin
XXX: 0.5~40Meters
A05: 0.5Meter
001: 01Meter
002: 02Meters
:
:
040: 40Meters

- △ Note:
- * RoHS Compliant
 - * ∅ Important dimension
 - * C1
Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Gray
Nut: Metal
Shield: Metal
Outer mold: Thermoplastic, Black
 - * C2
Waterproof rate: Non-Waterproof
Plug: RJ45, Shielded
 - * Cable: CAT-5E, FTP, 24#*4P+AI/My+D, PVC Jacket, OD=6.5mm, Black
 - * Cable length tolerance:
0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 40M: ±500 mm

Shield	Drain	地線	Shield
3	Brown	棕	8
2	White/Brown	白/棕	7
8	Green	綠	6
5	White/Green	白/綠	3
7	Blue	藍	4
1	White/Blue	白/藍	5
4	Orange	橘	2
6	White/Orange	白/橘	1
C1	Wire Color		C2
Pin Assignments Front View			
Pin Out			

8P

Twist

Twist

Twist

Twist

UNIT:mm	ACC, SEN, A Code, DB-ENDED	△
TOLERANCE	FM	△
SCALE	Free	SHEET 1 OF 1
REV. C	SIZE A4	QC: Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-04-30
DWG NO MSASXXFL-SPBML-SEXXX	CHECKED BY Sam Ho	DATE 2020-04-30
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-04-30