REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210561	2021/04/15	Vicky	B X4

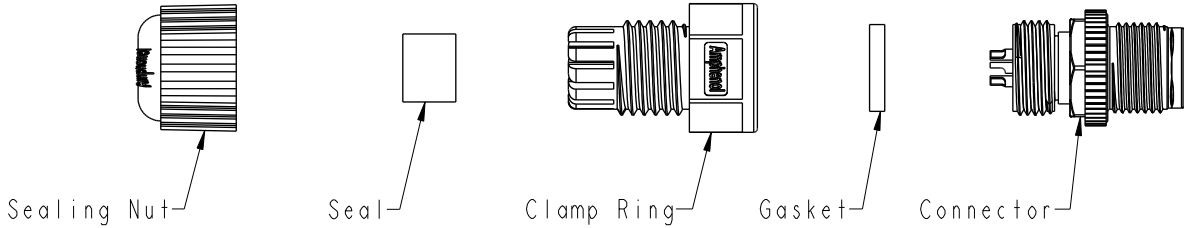

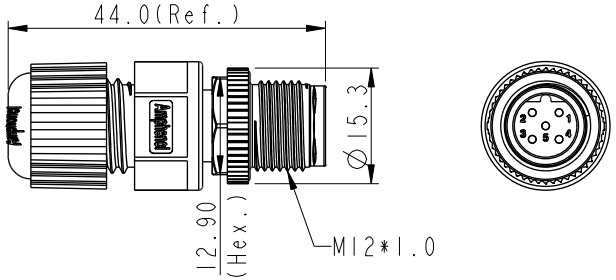

B MSBP-XXBMMA-SL8001

XX: No. Of Pin

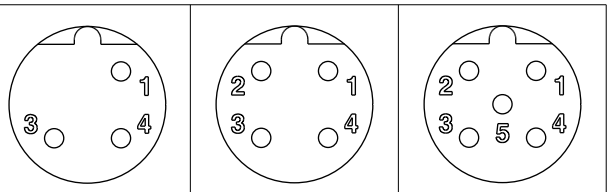

3P 4P 5P

Pin Assignments Front View

B Note:
* RoHS Compliant
* QC Important Dimension
* Waterproof rate: IPX8, mated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  Extension Nut: Thermoplastic, Black
  Nut: Thermoplastic, Black
* Gasket: Rubber, Gray
* Clamp Ring: Thermoplastic, Black
* Sealing Nut: Thermoplastic, Black
* Seal: Rubber, Gray, OD:Ø4.5mm~Ø6.5mm
* One set unassembled in one pe bag

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

B

TITLE: N SEN, M12 B -PLASTIC, SCREW CABLE W/O SR, M, M, FI SOLDER B

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. B | WC-REV. A.5 | QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY JC Chen	DATE 2019/08/28
DWG NO MSBP-XXBMMA-SL8001		CHECKED BY Li Feng	DATE 2019/08/28
CUSTOMER ALTW		APPROVED BY Jerry	DATE 2019/08/28

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.