
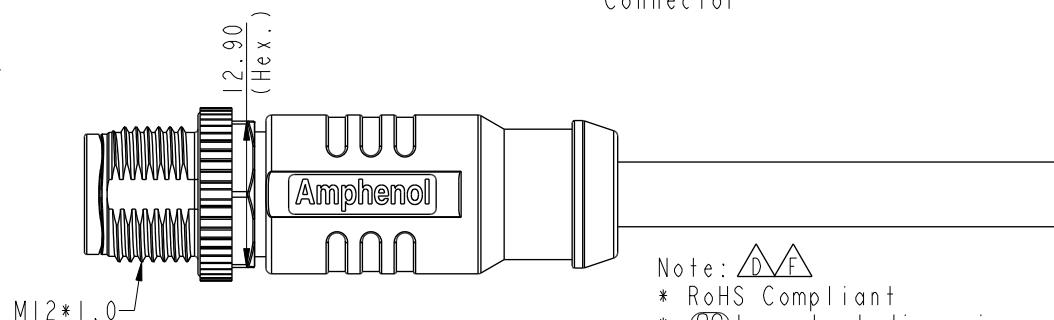
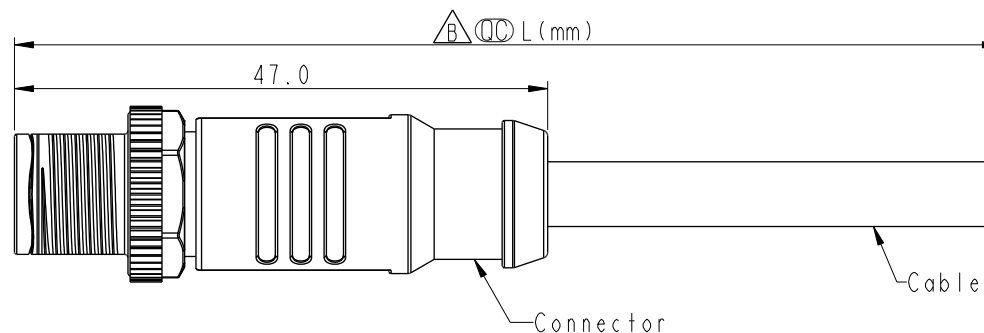


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C201524	2020/10/05	Vicky	 X4
E	C210084	2021/01/18	Vicky	 X1
F	C210211	2021/03/19	Ruru	 X2

MSBS-XXBMMM-SL8BXX

XX: No. Of Pin


XX:01~99Meters
01:01Meter
02:02Meters
:
99:99Meters

Pin Out

Shield	Braid
5 Gray	灰
4 Black	黑
3 Blue	藍
2 White	白
1 Brown	棕

Pin #	Wire
-------	------


Conn.



5P

Pin Assignments Front View

UNIT:mm



TOLERANCE

±0.5mm

TITLE N SEN, M12 B -SHLD, SCREW CABLE W/O SR, M, M, MOLDING 			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. F	WC-REV. A.1	 Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Brady	DATE 2019/03/05
DWG. NO  MSBS-XXBMMM-SL8BXX	CHECKED BY Eagle	DATE 2019/03/05
CUSTOMER ALTW	APPROVED BY Neo	DATE 2019/03/05

Note:  

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
-  Nut: Metal
Shield: Metal
Outer mold: Thermoplastic, Black
- * Cable: UL20549, Shield, 22#*5C+AL/MY+B, OD=5.7, PU Jacket, Black
- * Cable length tolerance: 1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm