


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1690064-065	2016/09/06	Yulong_wang	Add 3, 4 Pin & IP69K.
D	C201470	2020/10/05	Ruru	X6
E	C210309	2021/03/11	Ruru	X3






Recommended
Panel Cut-Out




MSBS-XXPFFP-SF8001

XX: No. Of Pin

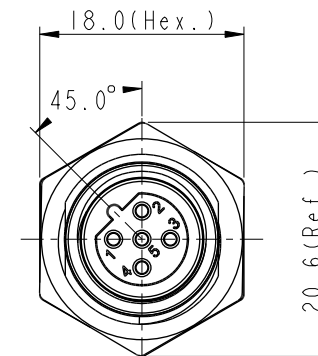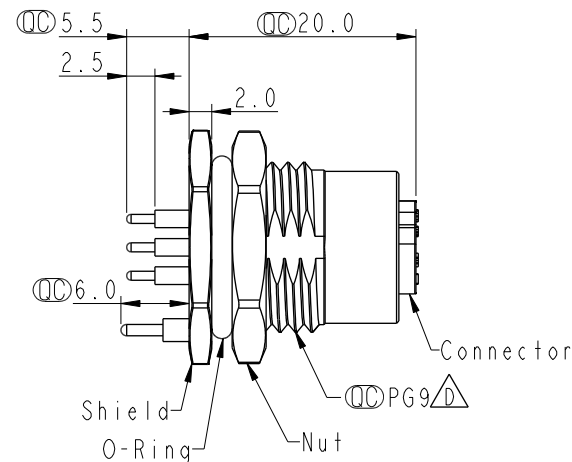


Note:


- * RoHS Compliant
- * Important dimension
- * Waterproof rate: IPX8, unmated 1m/24h
IPX9K, unmated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
- * Shield: Metal
- * Nut: Metal
- * O-Ring: Rubber, Black
- * For panel thickness max: 4.5mm
- * Nut is packed separately in pe bag



3P



4P




5P



Pin Assignment Front View

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE

N SEN, M12 B -SHLD, SCREW
RECEPTACLE, F, F, PCB S

SCALE

3:2

SIZE

A4

SHEET

1

OF

2

REV.

E

WC-REV.

A.5

Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

MSBS-XXPFFP-SF8001

CUSTOMER

ALTW

DRAWN BY

Yulong_wang

CHECKED BY

Jinhai

APPROVED BY

Jerry

DATE

2016-09-06


DATE

2016-09-06

DATE

2016-09-06

	1	2	3	4	5	6	7	8
F								
E								
D								
C								
B								
A								

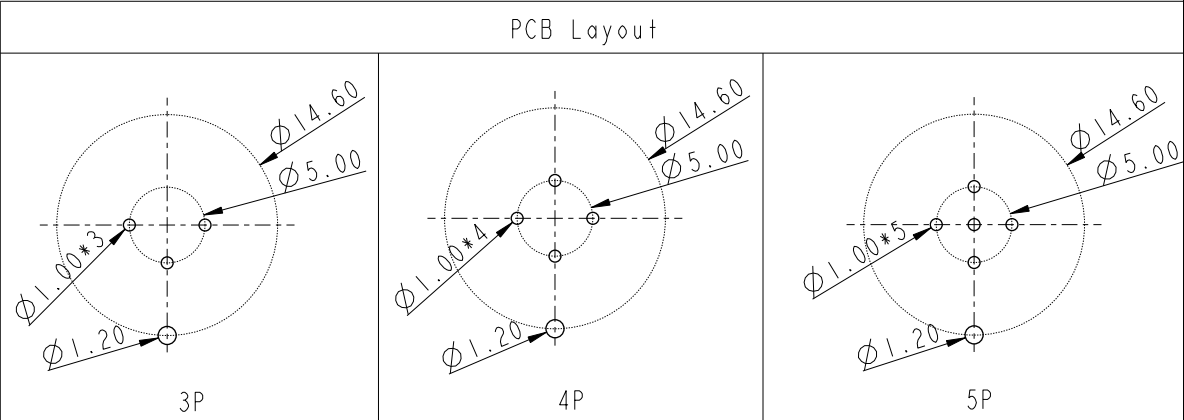

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.