


1		2		3		4		5		6		7		8	
								REV.	ECN NO.	DATE	SIGN	DESCRIPTION			
								A		2019/01/24	Brady	New Initial			
								B	C201786	2020/11/18	Ruru	△B X3			
								C	C210497	2021/03/31	Ruru	△C X2			



<

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2019/01/24	Brady	New Initial
B	C201786	2020/11/18	Ruru	△B X3
C	C210497	2021/03/31	Ruru	△C X2





C1

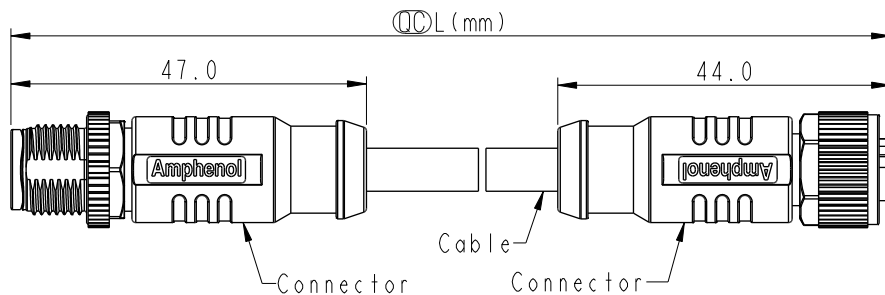


C2

Pin Out	Wire	Wire Color
5	Shield	灰 (Gray)
4	Gray	黑 (Black)
3	Black	藍 (Blue)
2	Blue	白 (White)
1	White	棕 (Brown)

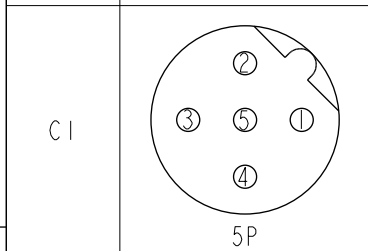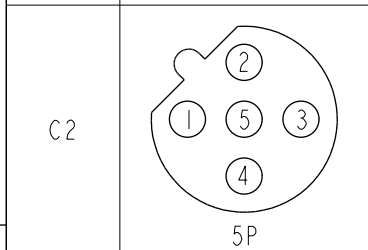

Pin Assignments Front View

UNIT:mm	
TOLERANCE	± 0.5mm

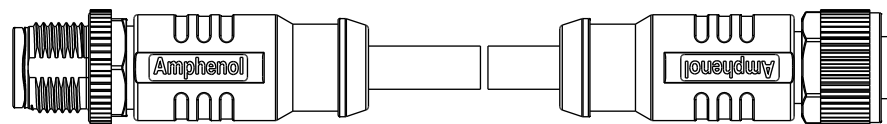

△B
MSBSXXML-SBSFL-SBXXX

XX: No. Of Pin

XXX: 0.5~99Meters
A05: 0.5 Meter
1: 01 Meter
2: 02 Meters
:
99: 99 Meters

Note: △B △C

- * RoHS Compliant
- * Important dimension
- * C1
 - Waterproof rate: IPX8, mated 1m/24h
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
- * C2
 - Waterproof rate: IPX8, mated 1m/24h
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Gray
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
- * Cable: UL20549, Shield, 22#*5C+AL/MY+B, OD=5.7mm, PU Jacket, Black
- * Cable length tolerance:
 - 0.5M < L ≤ 1M: +60/-0 mm
 - 1M < L ≤ 3M: +120/-0 mm
 - 3M < L ≤ 5M: +160/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

TITLE ACC, SEN, B Code, DB-ENDED MF			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Brady	DATE 2019/01/24
DWG NO △B MSBSXXML-SBSFL-SBXXX	CHECKED BY Eagle	DATE 2019/01/24
CUSTOMER ALTW	APPROVED BY Neo	DATE 2019/01/24