


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201808	2020/11/19	Vicky	 X3
C	C210084	2021/01/18	Vicky	 X1
D	C210237	2021/03/25	Ruru	 X2

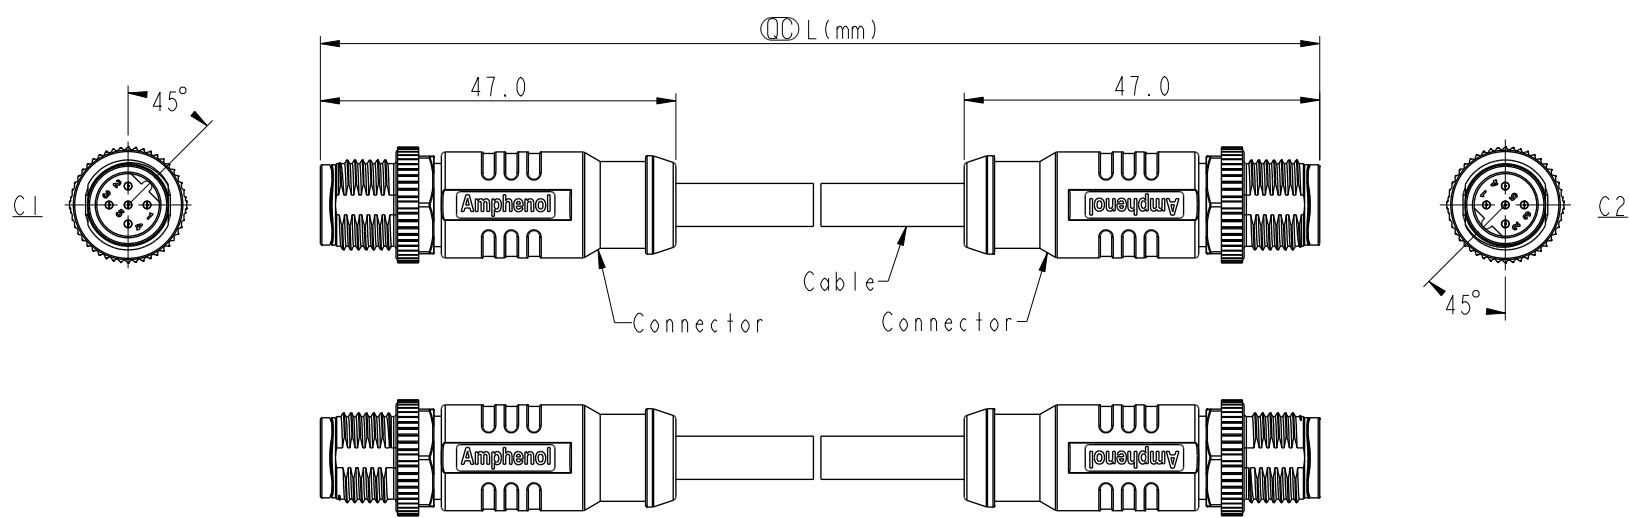

C	Pin Out	5	Shield	
		4	Gray	灰
		3	Black	黑
		2	Blue	藍
		1	White	白
			Brown	棕
		Pin #	Wire	
B	C1 & C2			
		5P		

Pin Assignments Front View

UNIT:mm		
TOLERANCE	$\pm 0.5 \text{ mm}$	

 MSBSXXML-SBSML-SBXXX

XX: No. Of Pin

XXX: 0.5~99Meters
A05: 0.5 Meter
001: 1 Meter
002: 2 Meters
:
099: 99 Meters

Note:   

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector:
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
- * Cable: UL20549, Shield, 22#*5C+AL/MY+B, OD=5.7mm, PU Jacket, Black
- * Cable length tolerance: $0.5M < L \leq 1M: +60/-0 \text{ mm}$
 $1M < L \leq 3M: +120/-0 \text{ mm}$
 $3M < L \leq 5M: +160/-0 \text{ mm}$
 $5M < L \leq 10M: \pm 100 \text{ mm}$
 $10M < L \leq 20M: \pm 200 \text{ mm}$
 $20M < L \leq 30M: \pm 300 \text{ mm}$
 $30M < L \leq 99M: \pm 500 \text{ mm}$

TITLE ACC, SEN, B Code, DB-ENDED MM			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV. A.5	 Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Brady	DATE 2019-01-24
DWG NO  MSBSXXML-SBSML-SBXXX	CHECKED BY Eagle	DATE 2019-01-24
CUSTOMER ALTW	APPROVED BY Neo	DATE 2019-01-24