


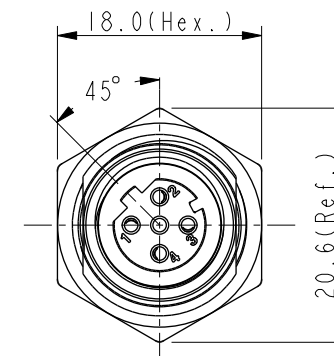


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201548	2020/10/14	Vicky	△C X3
D	C210084	2021/01/18	Vicky	△D X2
E	C210241	2021/04/14	Ruru	△E X3

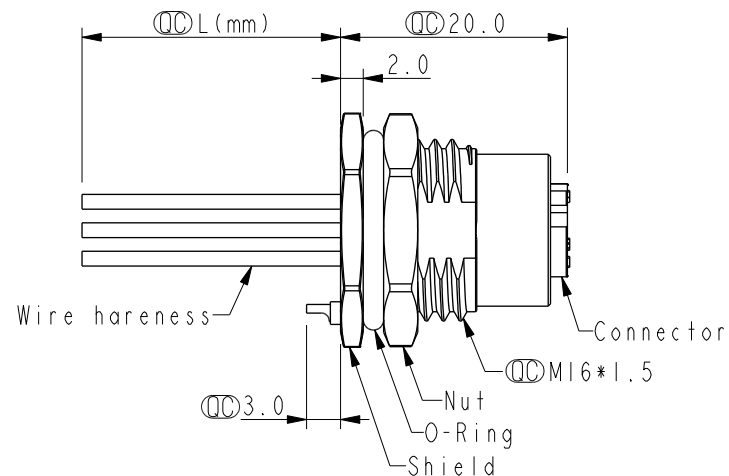


Recommended
Panel Cut-Out



4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

Pin # Wire
Pin Out



Pin Assignments.
Front View

△B△C△E
MSDS-XXPFFC-SF8CXX

XX: No. Of Pin

10: 100mm
15: 150mm
20: 200mm
95: 950mm
Cable Pitch Unit=50mm
A0: 1000mm
A5: 1500mm
Cable Pitch Unit=100mm
Wire Length (L): 150~1500 mm

Note: △B△C△D△E

- * RoHS Compliant
- * Important dimension
- * Waterproof rate: IPX8, unmated 1m/24h
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- O-Ring: Rubber, Green
- * Shield: Metal
- * Nut: Metal
- * O-Ring: Rubber, Black
- * Wire harness: UL1061, 22AWG
- * For panel thickness max: 4.5mm
- * O-Ring and nut are assembled on connectors
- * Wire harness tolerance: 100mm: ±10mm
100mm < L ≤ 300mm: ±15mm
300mm < L ≤ 1000mm: ±20mm
1000mm < L ≤ 1500mm: ±50mm

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE N SEN, M12 D -SHLD, SCREW RECEPTACLE, F, F, FI/PANEL CRIMP △E			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. E	WC-REV. A.1	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2019-09-24
DWG. NO △ MSDS-XXPFFC-SF8CXX	CHECKED BY Rita	DATE 2019-09-24
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-09-24