


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C201762	2020-11-11	Allen Pan	$\triangle C \times 3$
D	C201786	2020-11-16	Ruru	$\triangle D \times 3$
E	C210237	2021-03-30	Ruru	$\triangle E \times 1$

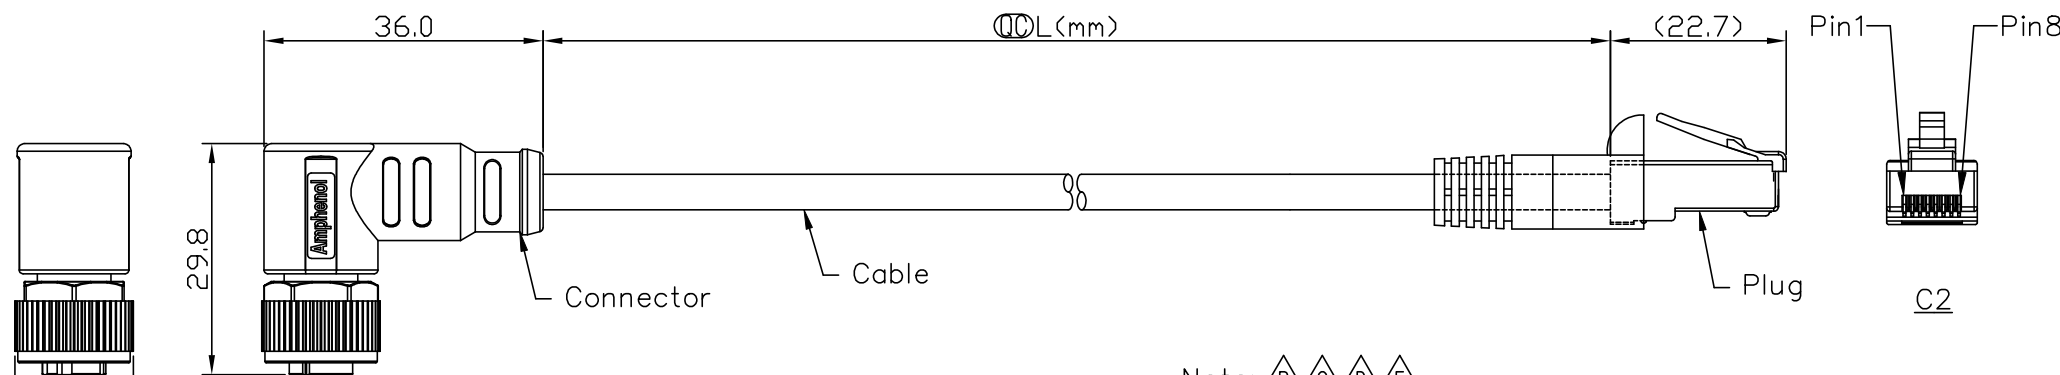

Note: $\triangle B \triangle C \triangle D \triangle E$

- * RoHS Compliant
- * QC Important dimension
- * C1


Waterproof rate: IPX8, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Gray
Nut: Metal
Shield: Metal
Outer mold: Thermoplastic, Black

- * C2

Waterproof rate: Non-Waterproof
Plug: RJ45, Shielded

- * Cable: CAT-5E, FTP, 22#*2P+AI/MY+D, OD=6.2mm, PU Jacket, Black

- * Cable length tolerance: $0.5M < L \leq 1M$: $+60/-0$ mm
 $1M < L \leq 3M$: $+120/-0$ mm
 $3M < L \leq 5M$: $+160/-0$ mm
 $5M < L \leq 10M$: ± 100 mm
 $10M < L \leq 20M$: ± 200 mm
 $20M < L \leq 30M$: ± 300 mm
 $30M < L \leq 40M$: ± 500 mm



XX: No. Of Pin

MSDSXXFR-SPBML-SEXXX


XXX: 0.5~40Meters
A05: 0.5Meter
001: 01Meter
002: 02Meters
...
040: 40Meters



Shield	Drain	地線	Shield
4	Green	綠	6
2	White/Green	白/綠	3
3	Orange	橘	2
1	White/Orange	白/橘	1
C1	Wire Color		C2
Pin Out			

Twist

Twist

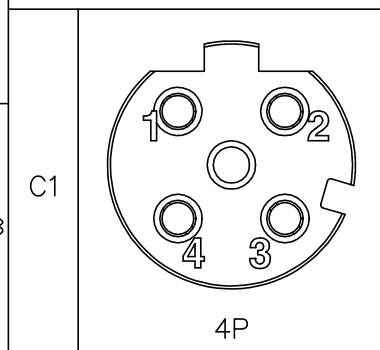

Pin Assignments
Front View

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	ACC, SEN, D Code, DB-ENDED FM
SCALE	Free	SHEET 1 OF 1
REV.	E	SIZE A4
		QC : Inspection Item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Allen Pan	2020-05-11
DWG NO	CHECKED BY	DATE
$\triangle$ MSDSXXFR-SPBML-SEXXX	Sam Ho	2020-05-11
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2020-05-11