
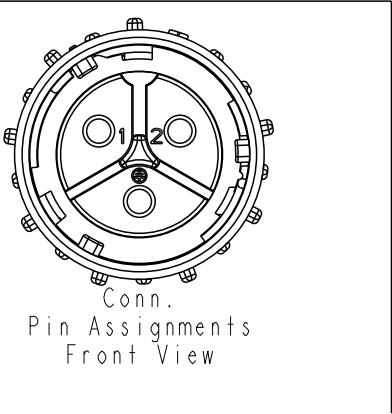


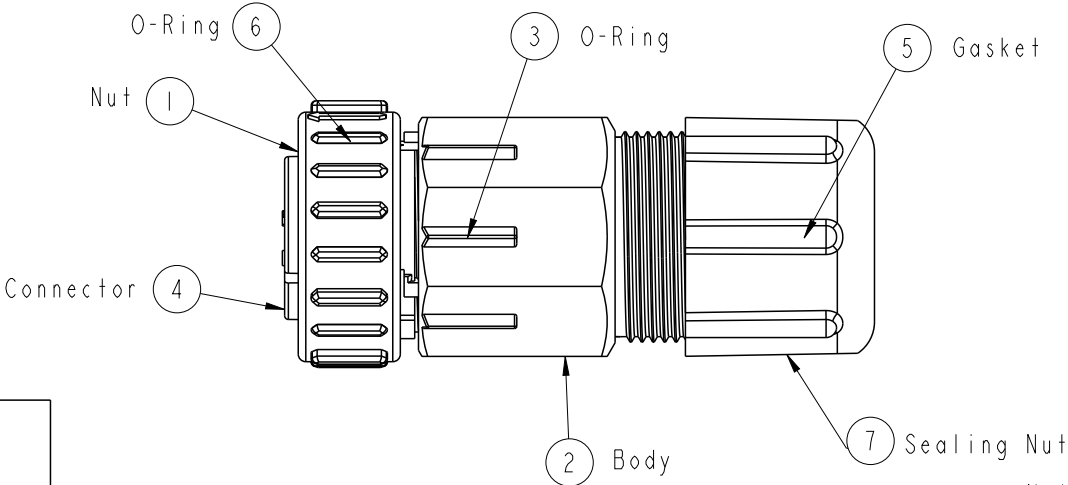


		2		3		4		5		6		7		8			
								REV.		ECN NO.		DATE		SIGN		DESCRIPTION	
								A		Initial Release		2013/05/21		Doreen		Change REV.01 to REV.A	
F																	
E																	
D																	
C																	
B																	
A																	

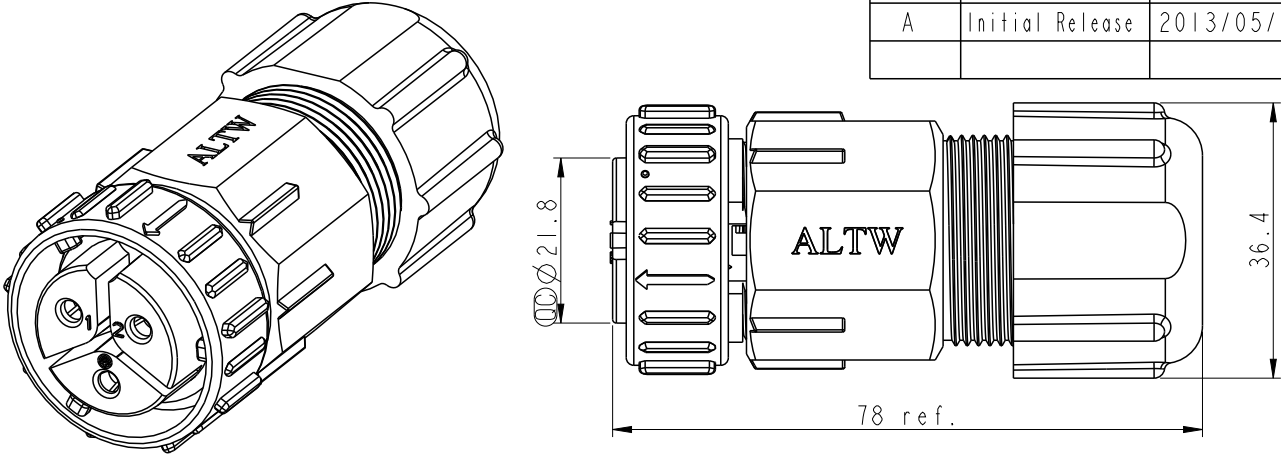

Conn.
Pin Assignments
Front View

Note:
* (QC)important Dimension To Check.
* Waterproof Rate : IP67
* Connector: PPE , Black
* Female Pin:Copper Alloy,Tin Plated
* Current Rating: 30A(Max.)
* Rated Voltage:300V
* Recommended Gauge: 8awg~14awg
* Nut: PPE , Black
* O-Ring & Gasket:Silicone , Gary
* Cable OD Max: BI:Ø10~Ø14.5mm

UNIT:mm						TITLE		ITEM NO		DRAWN BY		DATE	
						POWER CONNECTOR CABLE ASS'Y		PWL-03BFFA-TL7002		Doreen		2013/05/21	
TOLERANCE		±0.25		SCALE		1:1		DWG NO		CHECKED BY		DATE	
.X		±0.1		SIZE		A4		PWL-03BFFA-TL7002		Nick		2013/05/21	
.XX		±0.05		SHEET		1 OF 1		CUSTOMER		APPROVED BY		DATE	
.XXX		±1°		REV.		A		ALTW		Denys		2013/05/21	
ANGLES				WC-REV.		A.2							
				QC:Inspection item									

Amphenol LTW

安費諾亮泰企業股份有限公司

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY LTW.