


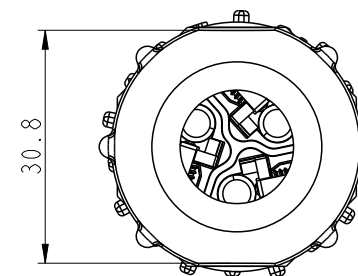
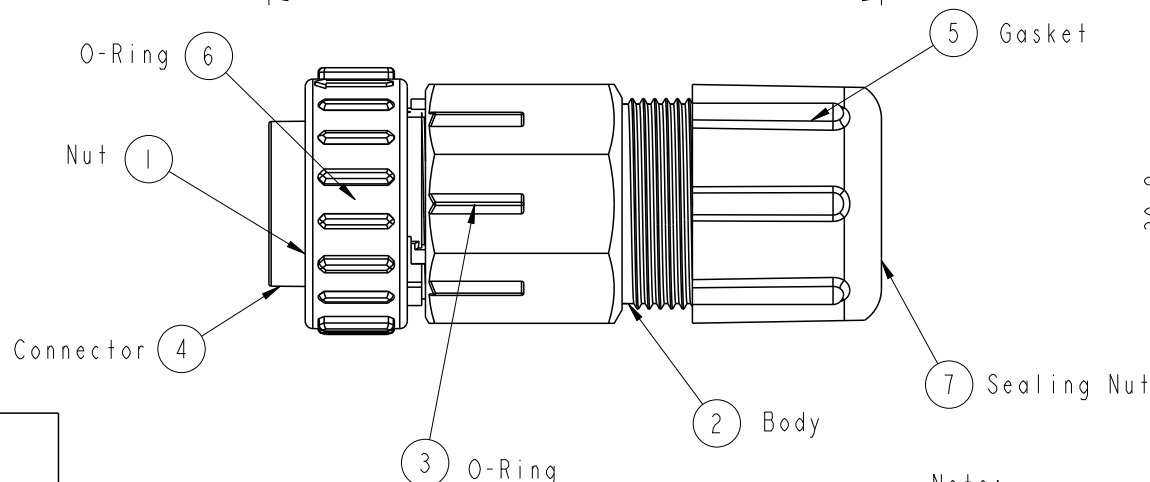


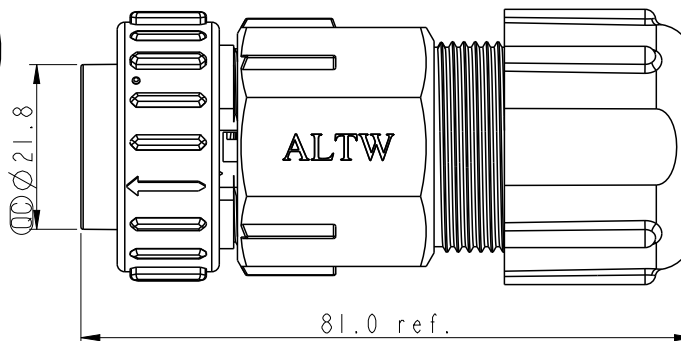


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A Initial Release		2013/5/21	Doreen	Change REV.01 to REV.A

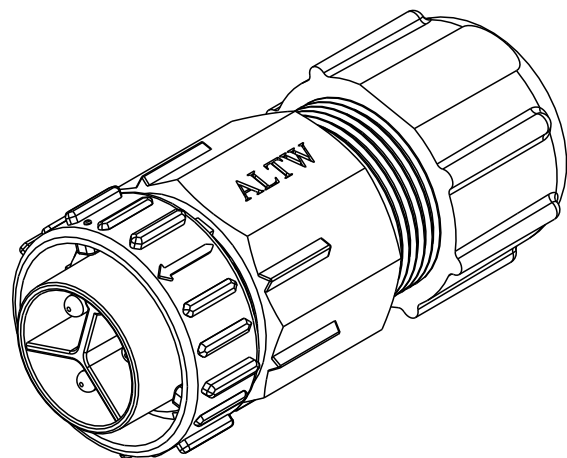

Conn.
Pin Assignments
Front View



Note:
 * (QC)important Dimension To Check.
 * Waterproof Rate : IP67
 * Connector: PPE , Black
 * Male Pin:Copper Alloy,Tin Plated
 * Current Rating: 30A(Max.)
 * Rated Voltage:300V
 * Recommended Gauge: 8awg~14awg
 * Nut: PPE , Black
 * O-Ring & Gasket: Silicone , Gary
 * Cable OD Max:Ø10~Ø14.5mm

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
				POWER CONNECTOR CABLE ASS'Y		PWL-03BFMA-TL7002		Doreen		2013/5/21	
						DWG NO		CHECKED BY		DATE	
						PWL-03BFMA-TL7002		Nick		2013/5/21	
						CUSTOMER		APPROVED BY		DATE	
						ALTW		Denys		2013/5/21	

Amphenol LTW
 安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY LTW.