



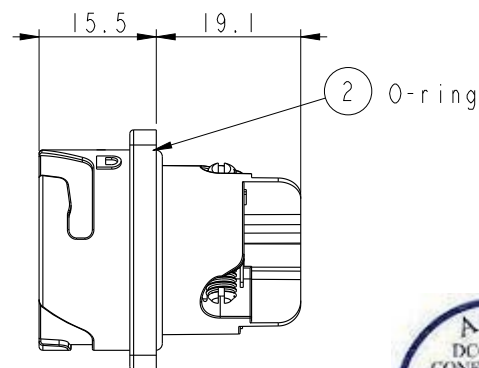
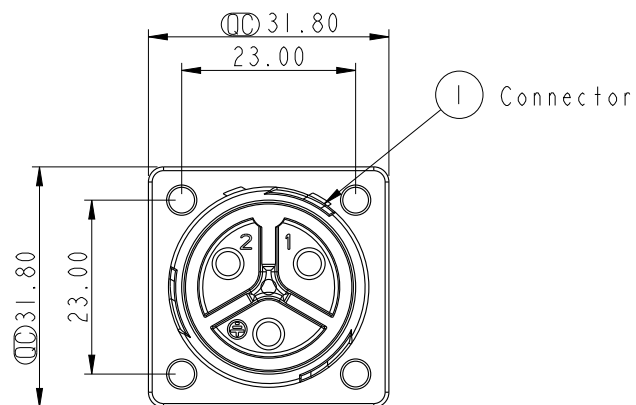




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2011-05-12	Ann	GAL-CFM TO NEW ITEM
B	LEN1780155	2017-07-31	Lingpeng	Change The Note

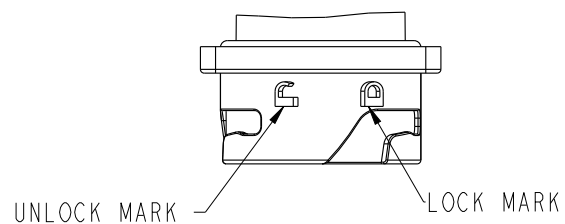

Conn.
Pin Assignments
Front View

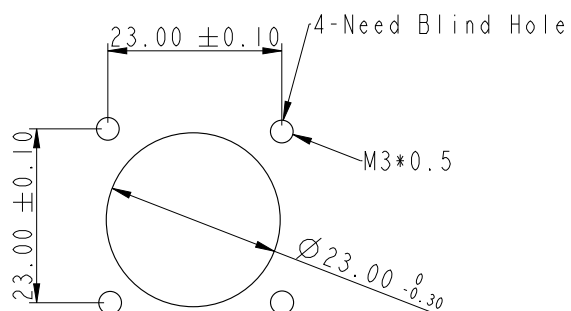

Recommended
Panel Cut-Out



- △ Note:
- * (QC)important Dimension To Check.
 - * Waterproof Rate : IP67
 - * Connector: PPE , Black
 - * Female Pin: Copper Alloy,Tin Plated
 - * O-Ring: Silicone , Gary
 - * Current Rating: 30A(Max.)
 - * Rated Voltage:300V
 - * Recommended Gauge: 8awg~14awg
 - * For Panel Thickness Max:4mm

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE POWER CONNECTOR FOR PANEL TYPE			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.3	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO PWL-03PMFB-TS7001	DRAWN BY Lingpeng	DATE 2017-07-31
DWG NO PWL-03PMFB-TS7001	CHECKED BY MaFei	DATE 2017-07-31
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2017-07-31