

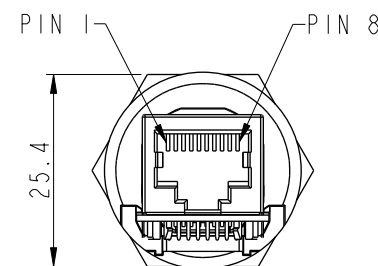
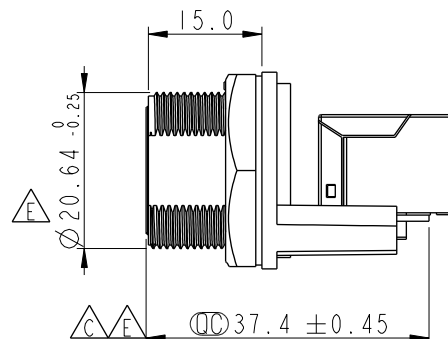
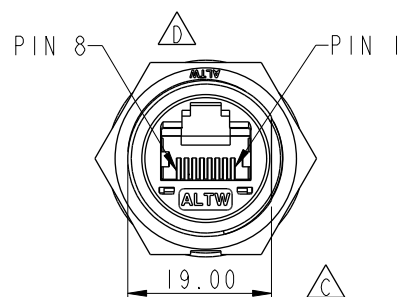
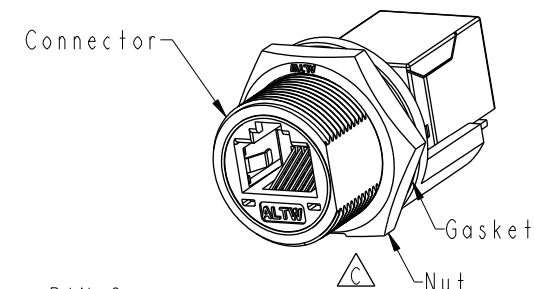


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1810008	2017/11/28	Jalam	Modify The Tolerance
F	C190405	2019/03/14	Ruru	Modify Note
G	C220799	2022/05/24	Vicky	$\triangle G$ X2

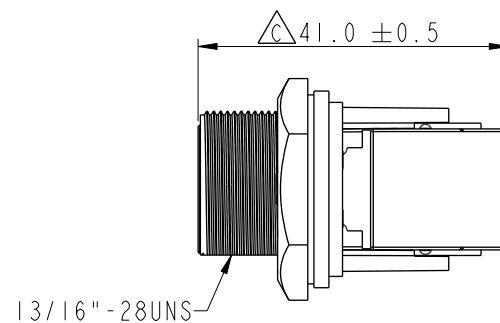

- $\triangle F$ $\triangle G$ Note:
- * RoHS Compliant
 - * QC Important dimension
 - * Waterproof rate: IPX7, mated
 - * Connector Housing: Thermoplastic, Black, RJ45 jack, shielded
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Panel thickness max: 3.0mm
 - * Use without waterproof cap or dust cap
Panel thickness max: 4.2mm
 - * Gasket and nut are packed separately in pe bag

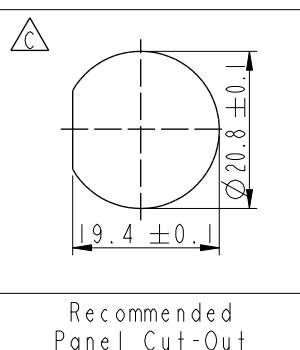

UNIT: mm		TITLE
TOLERANCE		RJ, C PLASTIC, C5E SHLD FRONT FASTENED, F, PNL JACK S, SCREW
.X ± 0.25		SCALE 1:1
.XX ± 0.1		SIZE A4
.XXX ± 0.05		SHEET 1 OF 1
ANGLES $\pm 1^\circ$		REV. G
		WC-REV. C.4
		QC : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	RCP-5SPFFH-SCM7001	DRAWN BY	Ruru	DATE	2019-03-14
DWG NO	RCP-5SPFFH-SCM7001	CHECKED BY	Rita	DATE	2019-03-14
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-14