

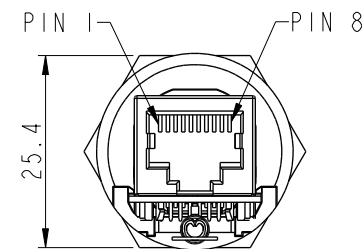
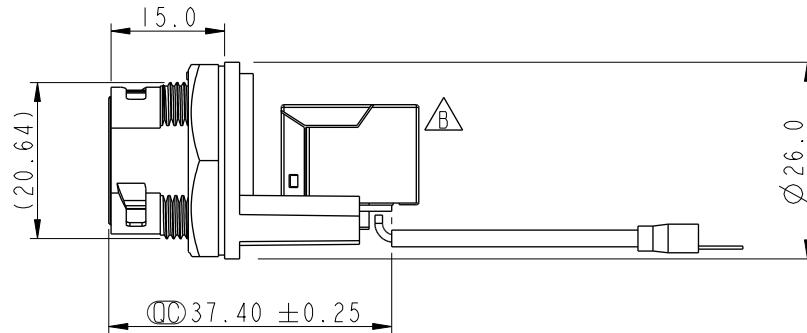
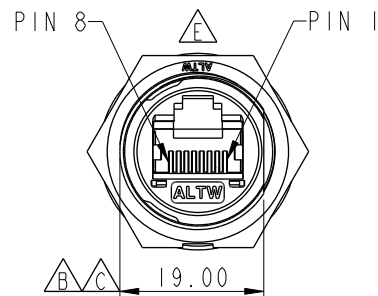
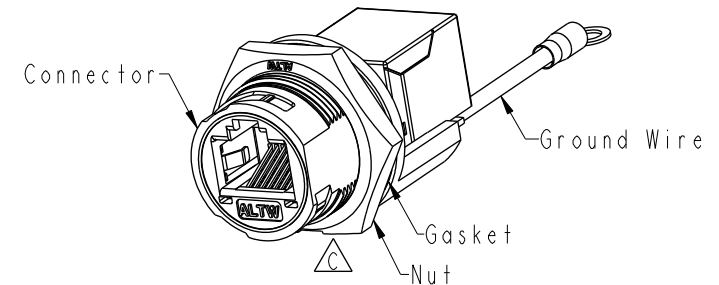


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C190405	2019/03/18	Ruru	Modify Note
E	C200524	2020/04/22	Vicky	△X2
F	C220799	2022/05/25	Vicky	△X1

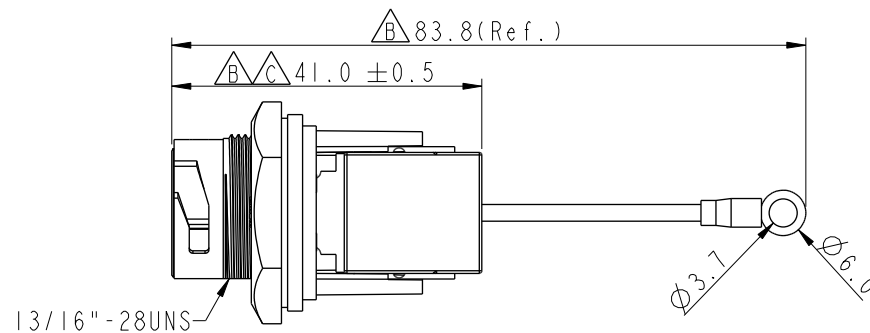

- △△△ Note:
- * RoHS Compliant
 - * ∅∅ Important dimension
 - * Waterproof rate: IPX7, mated
 - * Connector Housing: Thermoplastic, Black, RJ45 jack, shielded
 - * Nut: Thermoplastic, Black
 - △ * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
 - △ * Use without waterproof cap or dust cap
 - * Panel thickness max: 3.0mm
 - * Panel thickness max: 4.2mm
 - * Gasket and nut are assembled on connectors
 - * Wire: UL1015, 20AWG, Green



Recommended
Panel Cut-Out

UNIT:mm		TITLE
TOLERANCE		RJ, C PLASTIC, C5E SHLD FRONT FASTENED, F, PNL JACK S, 3LOCK
.X	±0.25	SCALE
.XX	±0.1	1:1
.XXX	±0.05	SIZE
ANGLES	±1°	A4
		SHEET
		OF
		1
REV.	F	WC-REV.
		B.4
		∅∅: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	RCP-5SPFFH-TCM7002	DRAWN BY	Ruru	DATE	2019-03-18
DWG NO	RCP-5SPFFH-TCM7002	CHECKED BY	Rita	DATE	2019-03-18
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-18

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.