


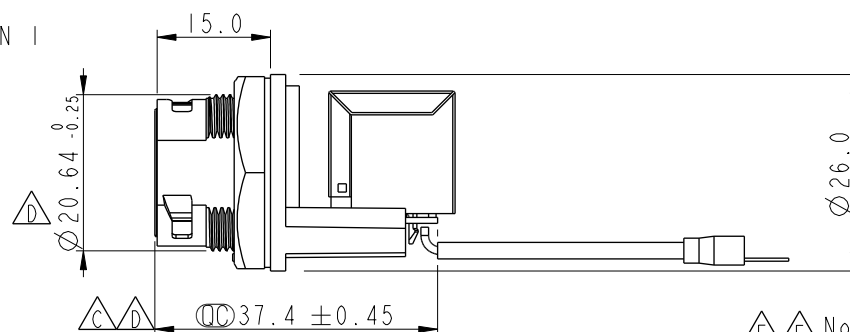
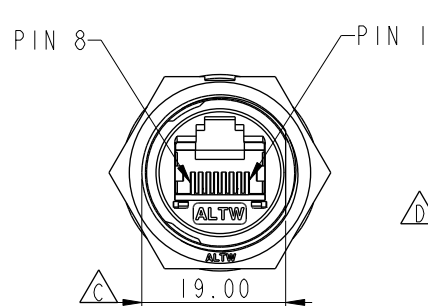
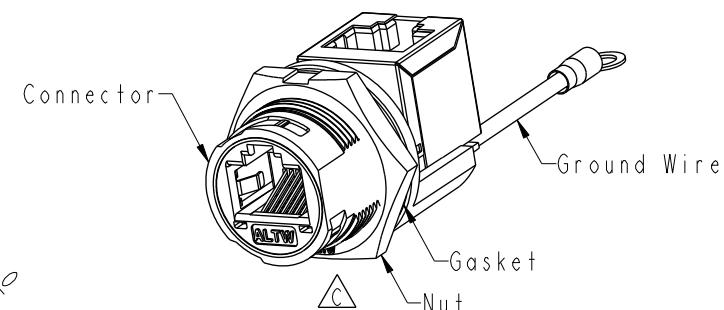


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1810012	2017/11/28	Jalam	Modify The Tolerance
E	C190405	2019/03/18	Ruru	Modify Note
F	C220799	2022/05/26	Vicky	△ F X2

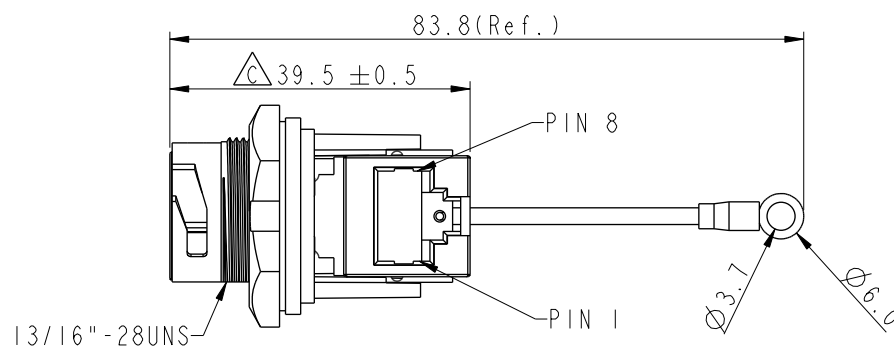

- △ E △ F Note:
- * RoHS Compliant
 - * Ⓞ Important dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black, RJ45 jack, shielded
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
 - Panel thickness max: 1.8mm
 - * Use without waterproof cap or dust cap
 - Panel thickness max: 3.0mm
 - * Gasket and nut are assembled on connectors
 - * Wire: UL1015, 20AWG, Green



Recommended
Panel Cut-Out

UNIT: mm		TITLE		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
TOLERANCE		RJ, C PLASTIC, C5E SHLD		安費諾亮泰企業股份有限公司		RCP-5SPFFV-TCM7002		Ruru		2019-03-18	
.X ±0.25		FRONT FASTENED, F, PNL JACK R, 3 LOCK				RCP-5SPFFV-TCM7002		Rita		2019-03-18	
.XX ±0.1		SCALE				CUSTOMER		Max		2019-03-18	
.XXX ±0.05		SIZE									
ANGLES ±1°		SHEET									
		REV.									
		WC-REV.									
		B.5									
		Ⓞ: Inspection item									