


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION

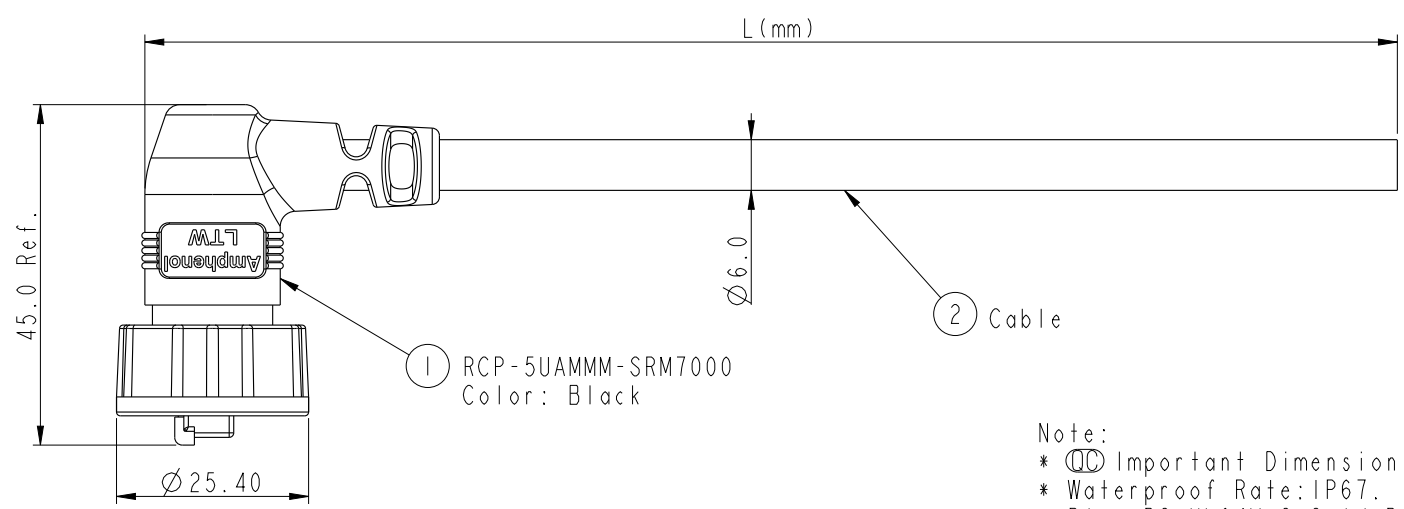

1 RCP-5UAMMM-SRM7000
Color: Black

2 Cable



- Note:
- * Important Dimension
 - * Waterproof Rate: IP67.
 - * Plug: PC, UL94V-2, Gold Plated,
 - * Screw Nut: Nylon+GF, Black.
 - * Gasket: EPDM, Black.
 - * Cable: (A) CAT5E UTP, OD Max.: $\varnothing 6.0$, Black.
 - * Cable Length Tolerance: 01M: ± 40 mm
02~05M: ± 60 mm
06~10M: ± 100 mm
11~30M: ± 200 mm
30~99M: ± 500 mm

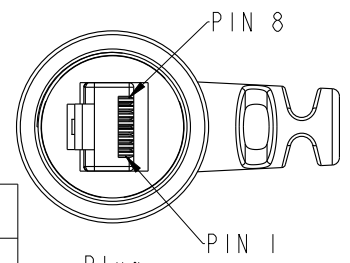

RCP-5UAMMM-SRM7AXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L): 01~99Meters

X:
(A) CAT5E UTP



Pin Out		
Wire Color		Plug
Drain Wire	接地	
Brown	棕	8
Brown/white	棕/白	7
Green	綠	6
Blue/white	藍/白	5
Blue	藍	4
Green/white	綠/白	3
Orange	橙	2
Orange/white	橙/白	1

Twist 對絞
Twist 對絞
Twist 對絞

UNIT:mm		TITLE RJ45,C SIZE,RIGHT ANGLE CABLE SCREW 5E M CONN M PIN
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$	SCALE 1:1	SIZE A4
	REV. A	SHEET 1 OF 1
	WC-REV. A.18	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Laurence_zang	DATE 2013-04-19
DWG NO RCP-5UAMMM-SRM7AXX	CHECKED BY Raison	DATE 2013-04-19
CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2013-04-19