
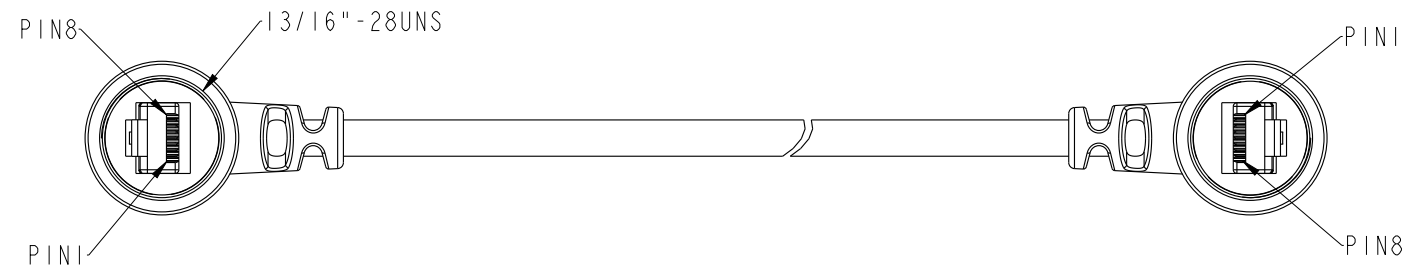


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191395	2019/07/29	JC Chen	Dimensional tolerance change
C	C191828	2019/10/22	JC Chen	$\triangle C$ XI
D	C200306	2020/03/19	JC Chen	$\triangle D$ XI

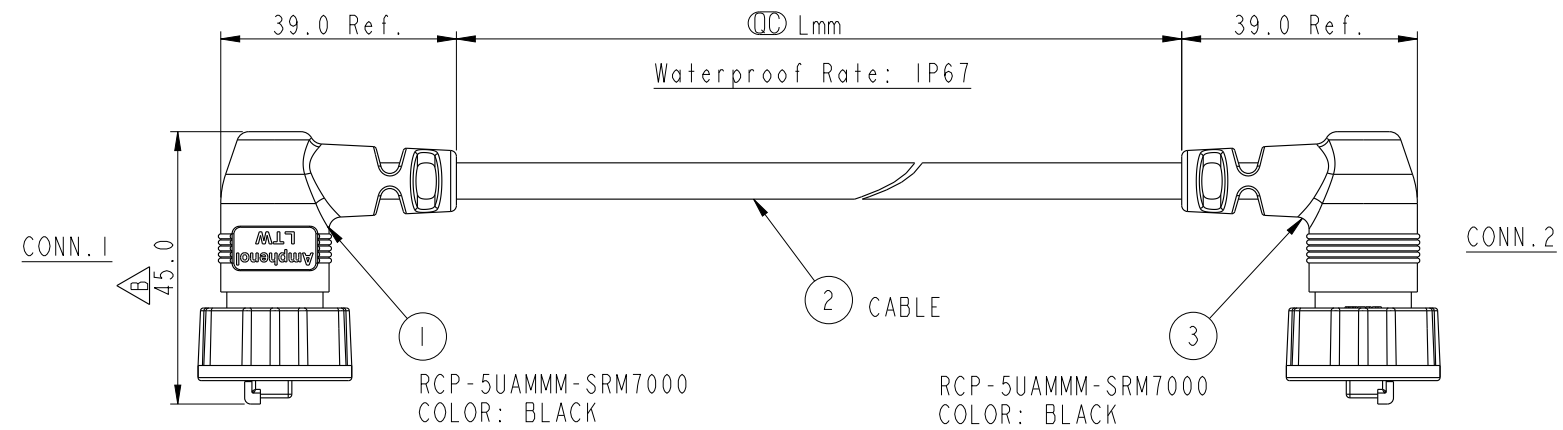

RCP5UM-RCP5UM-SR7AXX

8	BROWN	棕	8
7	WHITE/BROWN	白/棕	7
6	GREEN	綠	6
5	WHITE/BLUE	白/藍	5
4	BLUE	藍	4
3	WHITE/GREEN	白/綠	3
2	ORANGE	橘	2
1	WHITE/ORANGE	白/橘	1
Conn.1	Wire Color		Conn.2
	PIN OUT		

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L):01~99Meters

Note:
* $\triangle C$ Important Dimention To Check
* Waterproof Rate: IP67 (Mating)
* Screw Nut: Nylon+GF, Black
* RJ Plug: Unshield, Phosphor Bronze, Gold Plated
* Cable: NOUL, CAT5E UTP 24#*4P, OD6.0, Black
* Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE	RJ DOUBLE-90 ENDED, WITH CONN 13/16"-28UNS		Amphenol LTW	ITEM NO	DRAWN BY	DATE
TOLERANCE	.X ±0.5	SCALE	4:5	SIZE A4	安費諾亮泰企業股份有限公司	DWG NO	JC Chen	2019-07-29
REV.	D	SHEET	1	OF 1		RCP5UM-RCP5UM-SR7AXX	Li Feng	2019-07-29
		WC-REV.	A.5	$\triangle C$ Inspection item		CUSTOMER	Jerry	2019-07-29
						ALTW		