

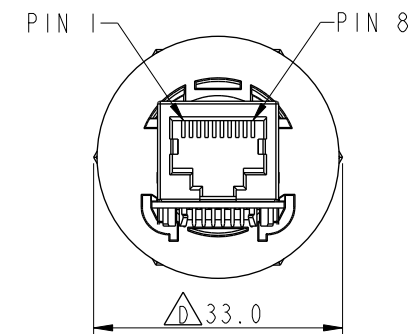
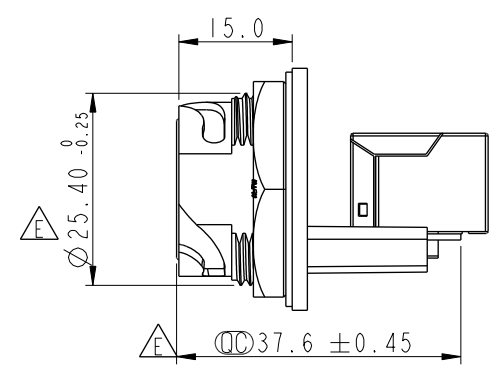
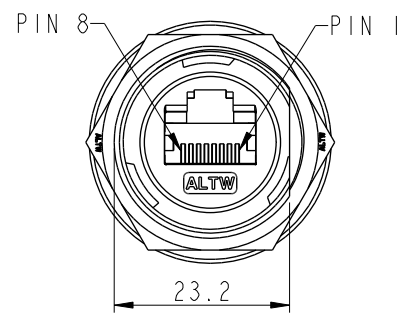
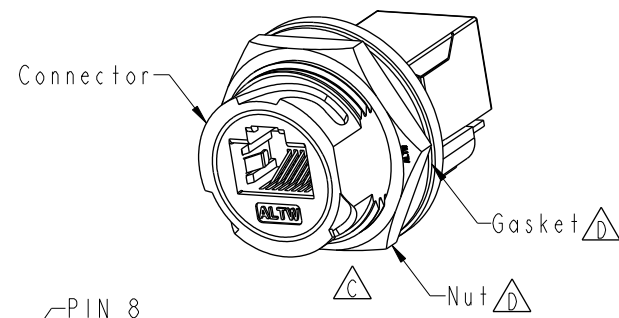


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1810059	2017/11/29	Jalam	Change The Tolerance
F	C190405	2019/03/15	Ruru	Modify Note
G	C220800	2022/05/31	Vicky	$\triangle G$ X2

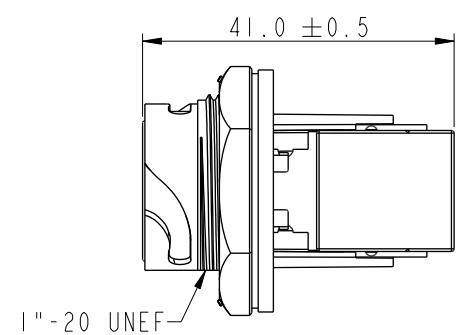

- $\triangle F$ $\triangle G$ Note:
- * RoHS Compliant
 - * CC Important dimension
 - * Waterproof rate: IPX7, unmated
 - * Connector Housing: Thermoplastic, Black, RJ45 jack, shielded
 - * Nut: Thermoplastic, Black
 - * $\triangle D$ Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Panel thickness max: 1.3mm
 - * Use without waterproof cap or dust cap
Panel thickness max: 2.5mm
 - * Gasket and nut are packed separately in pe bag



Recommended
Panel Cut-Out

UNIT: mm				TITLE RJ, D PLASTIC, C5E SHLD FRONT FASTENED, F, PNL JACK S, 3LOCK $\triangle G$		ITEM NO RDP-5SPFFH-TCU7001		DRAWN BY Ruru		DATE 2019-03-15	
TOLERANCE		SCALE 1:1		SIZE A4		DWG NO RDP-5SPFFH-TCU7001		CHECKED BY Rita		DATE 2019-03-15	
.X ±0.25		REV. G		WC-REV. B.7		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-03-15	
.XX ±0.1		SHEET 1		OF 1							
.XXX ±0.05		CC : Inspection item									
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司