


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1490334	2014-09-06	Joyy	Change to 94V0 material
C	CI91686	2019-09-25	JC Chen	Dimensional tolerance change

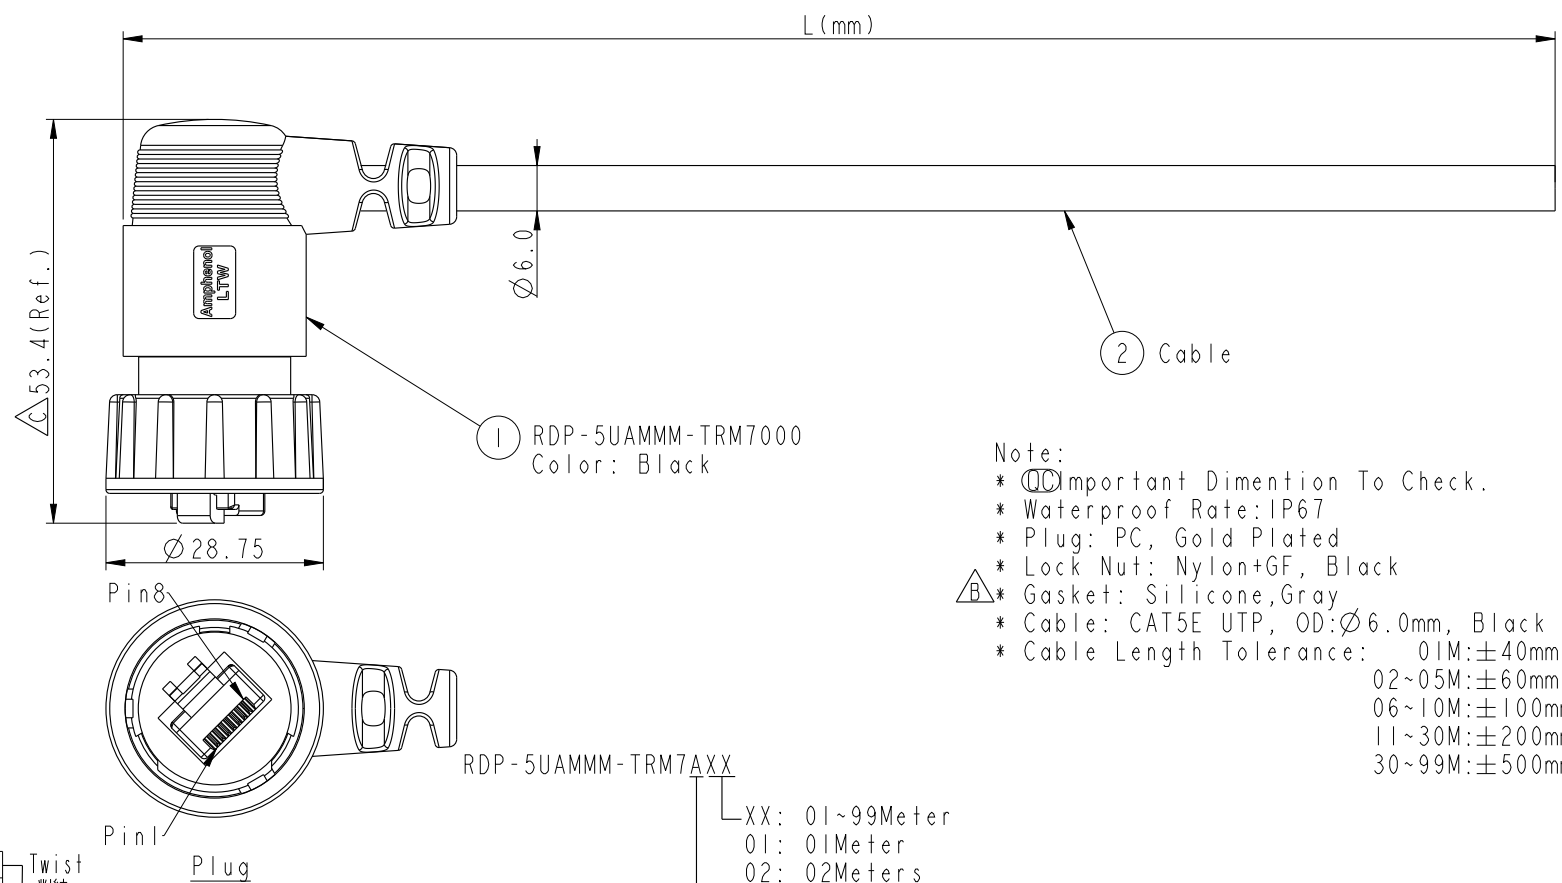

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Plug: PC, Gold Plated
 - * Lock Nut: Nylon+GF, Black
 - * Gasket: Silicone, Gray
 - * Cable: CAT5E UTP, OD: $\phi 6.0$ mm, Black
 - * Cable Length Tolerance:
 - 01M: ± 40 mm
 - 02~05M: ± 60 mm
 - 06~10M: ± 100 mm
 - 11~30M: ± 200 mm
 - 30~99M: ± 500 mm

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L): 01~99Meters

X:
(A)CAT5E UTP



Brown	棕	8	Twist 對絞
White/Brown	白/棕	7	
Green	綠	6	Twist 對絞
White/Blue	白/藍	5	
Blue	藍	4	Twist 對絞
White/Green	白/綠	3	
Orange	橘	2	Twist 對絞
White/Orange	白/橘	1	
Wire Color		Plug	
Pin Out			

UNIT:mm		TITLE Cable Lock 5E M Conn M Pin	
TOLERANCE	± 0.5	SCALE 1:1	SHEET 1 OF 1
REV. C	WC-REV. .0	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY JC Chen	DATE 2019-09-25
DWG NO RDP-5UAMMM-TRM7AXX	CHECKED BY Li Feng	DATE 2019-09-25
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-09-25